

Sonic Sifter Separator

For Laboratory Particle Size Analysis



A Powerful Tool: The Original Sonic Sifter Separator.

A superior sieving instrument, the Sonic Sifter Separator is precise, versatile and ideal for research and quality assurance applications.

Specially designed 3" diameter acrylic framed sieves and a patented oscillating air column allows this unit to achieve efficiencies previously seen only with wet sieving for materials in powdered, granular or pellet form. The Sonic Sifter is virtually maintenance free and is capable of achieving separations ranging from 3 μ m to 5.6 mm. There is no screen wear or particle attrition. Particle separations can be accomplished in less than 10 seconds under favorable conditions – cutting testing times by up to 90% over other methods.

With the Sonic Sifter Separator:

- A vertical, oscillating column of air "tries" the particles 60 times per second, and a vertical mechanical pulse shears agglomerates and reorients the particles in the air column.
- Special see-through acrylic framed sieves help determine proper power level and finish point.
- Action can be varied for different densities and textures as the power level to separate particles is infinitely adjustable.
- Fine particle separation for dry sieving ranges from 3 μ m to 5.6 mm.
- Automatic timing ensures repeatable results.
- Easy to operate.
- No need for periodic adjustments or re-calibration.



Pricing

Model

L3P (110vac / 60Hz)

L3P-15 (110vac / 50Hz)

L3P-25 (220vac / 50Hz)

L3P-26 (220vac / 60Hz)

Each unit includes: Complete stack assembly, electrical line cord and an operation manual. Sieves required for particle separation are not included, but can be ordered separately on the back side of this page.

Prices effective January 1, 2012. This price list supercedes all previous price lists. All prices are FOB factory in New Berlin, Wisconsin, and are subject to change without notice.

Made in U. S. A.

Basic Specifications

Capacity

3" Clear Acrylic Frame Sieve

- 6 each U.S. Standard L3-S Sonic Sifter Sieves, or
- 3 each Precision Electroformed Nickel Mesh Sieves

Sieves must be ordered separately.

Operating Ranges

Temperature - 0° to 120° F (-18° C to 49° C)

Humidity – any (non-condensing)

For optimal results, temperature and humidity should be controlled.

Dimensions

10" w x 12" d x 23" h

25 cm x 31 cm x 61 cm

Weight

43 lbs (20 kg)

Built-in digital timer (+/- 2 seconds over 24 hours)

Warranty

Limited one-year warranty

Product specifications are subject to change without notice.



Advantech Manufacturing, Inc.

2450 S. Commerce Drive

New Berlin, WI 53151

800.511.2096 Toll Free


262.786.1600 Tel

262.786.5074 Fax

sales@advantechmfg.com

www.advantechmfg.com

Sonic Sifter Separator Accessories For Laboratory Particle Size Analysis

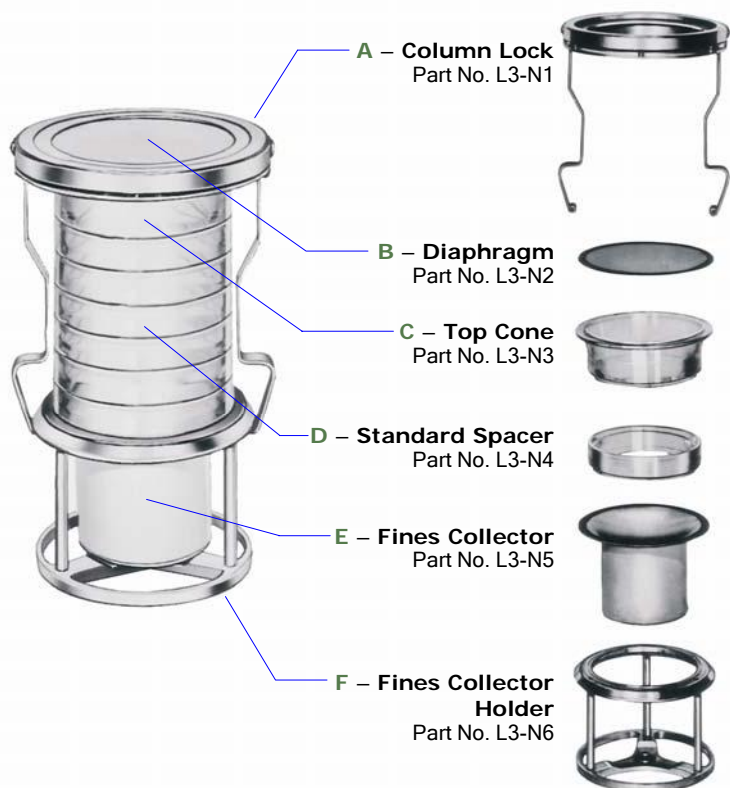

Item	Description	Part Number	Price
A	Column Lock	L3-N1	
B	Diaphragm	L3-N2	
C	Top Cone	L3-N3	
D	Standard Spacer	L3-N4	
E	Fines Collector	L3-N5	
F	Fines Collector Holder	L3-N6	
	Complete Stack Assembly *	L3-N7	

* Includes column lock, diaphragm, top cone, six standard spacers, fines collector and fines collector holder.

Horizontal Pulse Accessory

A must for accurate separations below 45 μm , this electromechanical device eliminates agglomerates in extremely fine powders. A tapping action alternates on opposite sides of the screen frame to create a high speed shock wave, breaking down agglomerated materials and reintroducing near-sized particles back into the air stream, and then back onto the screening media.

L3-N8 (110vac / 50 or 60 Hz)

Includes: Power supply with electrical line cord for 110 volt operation, machined pulse assembly is designed to fit in the sieve stack taking the place of one sieve or spacer.



Sonic Sifter Sieves 3" Diameter

- Stainless steel wire cloth of sieves listed meets the current ASTM E11 Sieve Specifications.
- Supplied with Certificate of Compliance.
- Clear acrylic frame. Dimensions: 3-1/2" O.D., 3" I.D. with an overall height of 5/8".

U.S. Sieve No.	Opening Size	Part Number	Price
#3.5	5.60 mm	L3-S3.5	
#4	4.75 mm	L3-S4	
#5	4.00 mm	L3-S5	
#6	3.35 mm	L3-S6	
#7	2.80 mm	L3-S7	
#8	2.36 mm	L3-S8	
#10	2.00 mm	L3-S10	
#12	1.70 mm	L3-S12	
#14	1.40 mm	L3-S14	
#16	1.18 mm	L3-S16	
#18	1.00 mm	L3-S18	
#20	850 μm	L3-S20	
#25	710 μm	L3-S25	
#30	600 μm	L3-S30	
#35	500 μm	L3-S35	
#40	425 μm	L3-S40	
#45	355 μm	L3-S45	
#50	300 μm	L3-S50	
#60	250 μm	L3-S60	
#70	212 μm	L3-S70	
#80	180 μm	L3-S80	
#100	150 μm	L3-S100	
#120	125 μm	L3-S120	
#140	106 μm	L3-S140	
#170	90 μm	L3-S170	
#200	75 μm	L3-S200	
#230	63 μm	L3-S230	
#270	53 μm	L3-S270	
#325	45 μm	L3-S325	
#400	38 μm	L3-S400	
#450	32 μm	L3-S450	
#500	25 μm	L3-S500	
#635	20 μm	L3-S635	

Sieve Opening	Part Number	Price	Sieve Opening	Part Number	Price
3 μm	L3-M3		60 μm	L3-M60	
5 μm	L3-M5		65 μm	L3-M65	
10 μm	L3-M10		70 μm	L3-M70	
15 μm	L3-M15		75 μm	L3-M75	
20 μm	L3-M20		80 μm	L3-M80	
25 μm	L3-M25		85 μm	L3-M85	
30 μm	L3-M30		90 μm	L3-M90	
35 μm	L3-M35		95 μm	L3-M95	
40 μm	L3-M40		100 μm	L3-M100	
45 μm	L3-M45		105 μm	L3-M105	
50 μm	L3-M50		125 μm	L3-M125	
55 μm	L3-M55		150 μm	L3-M150	

Prices effective January 1, 2012. This price list supersedes all previous price lists. All prices are FOB factory in New Berlin, Wisconsin. Prices are subject to change without notice.

Made in U.S.A.