

# PSC-U120 Series



Input: 85-264VAC 47/63Hz  
 Output Voltage: 12, 24 & 48 V DC  
 Rated Power: 120W max.



## FEATURES

- Universal AC input range (90~264Vac)
- High efficiency up to 89%
- Built-in current limiting circuit
- Output protections: OVP/OLP/SCP/OTP
- Wide operating ambient temp (-20°C~70°C)
- Built-in DC OK function (indication only)
- Can be installed on TS-35/7.5 or TS-35/15
- 100% full load burn-in test
- Suitable for critical applications
- Operating altitude up to 6000m
- PCB with conformal coating
- Ultra-slim, 45mm width
- 3 years warranty

## CATALOG NUMBER

**PSC-U12012**

**PSC-U12024**

**PSC-U12048**

### INPUT

Voltage Range	90Vac~264Vac, 127Vdc-370Vdc		
Frequency Range	47Hz~63Hz		
AC Current (max.)	<2.7 A/115VAC ; <1.35A/230VAC		
Inrush Current (Typical)	20A/115Vac ; 35A/230Vac Cold start		
Leakage Current	Input—output: ≤0.25mA	Input—PG: ≤3.5mA	(264Vac input, 63Hz)
Efficiency ( Typical)	85%	88%	89%

### OUTPUT

DC Output	12V	24V	48V
Rated Current	10A	5A	2.5A
Current Range <i>Note 1</i>	0~10A	0~5A	0~2.5A
Ripple and Noise	0~70°C ≤120mV	≤120mV	≤240mV
<i>Note 2</i>	-20°C~0 ≤240mV	≤240mV	≤480mV
Voltage ADJ. Range	12~14V	24~28V	48~56V
Voltage Accuracy	±1.0%		
Line Regulation	±0.5%		
Load Regulation	±1.0%		
Set-up Time	<1.2S@230Vac ; <3.0mS@115Vac		
Hold up Time	≥10mS@115Vac; ≥20mS@230Vac Full load		
Temperature Coefficient	±0.03%/°C		
Overshoot	<5.0%		

### ENVIRONMENTAL

Operating amb. Temp. & Hum.	-20°C~70°C; 20%~90%RH No condensing (pls refer to derating curve)
Storage Temp. & Hum.	-40°C~85°C; 5%~95%RH No condensing

### PROTECTIONS

Over Load	10.5~13A Protection type: Constant current	5.25~6.5A	2.75~3.25A
Over voltage	15~18V Protection type: Shut down, re-power on.	29~33V	58~63V
Over temperature	100±5°C, detect on heat sink of power transistor; shut down O/P, re-power on.		
Short Circuit	Long-term mode, auto recovery		

### SAFETY & EMC

*Note 3*

Safety Standards	UL508, UL60950-1, EN62368-1
Withstand Voltage	Primary-Secondary: 3.0KVac/10mA .Primary-PG: 2KVac/10mA. Secondary-PG: 0.5KVac/10mA.
Isolation Resistance	10M ohms
EMC Emission	Compliance to EN55032 Class B
Harmonic Current	Compliance to EN61000-3-2, Class A
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,11;

### OTHER

MTBF (MIL-HDBK-217F)	More than 500,000Hrs (25°C Full load)
Dimension (L*W*H)	124*119*45mm
Packing	24pcs/CTN, 15.0Kg, 0.04cbm
Cooling method	Cooling by free air convection

### NOTES

1. All parameters NOT specially mentioned are measured at rated input, rated load and 25°C of ambient temperature.
2. Measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF & 10uF parallel capacitor.
3. The power supply is considered as a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies".

## Mechanical Specification

### 1.AC Screw terminal information


Terminal No.	Function	Wire Spec	Recommended Torque
1	PE	20~10AWG	5Nm
2	N		
3	L		

### 2.DC Screw terminal information

Terminal No.	Function	Wire Spec	Recommended Torque
4-6	V+	20~10AWG	5Nm
7-9	V-		

### AC/DC Terminal

Type	Screw terminal blocks
Solid Wire	0.5-6mm <sup>2</sup>
Strand Wire	0.5-4mm <sup>2</sup>
Wire Spec	AWG20-10
Max Wire Diameter	2.8mm
Recommended stripping length	7mm
Screwdriver	3.5mm Straight or Cross Screwdriver
Recommended Torque	0.5NM

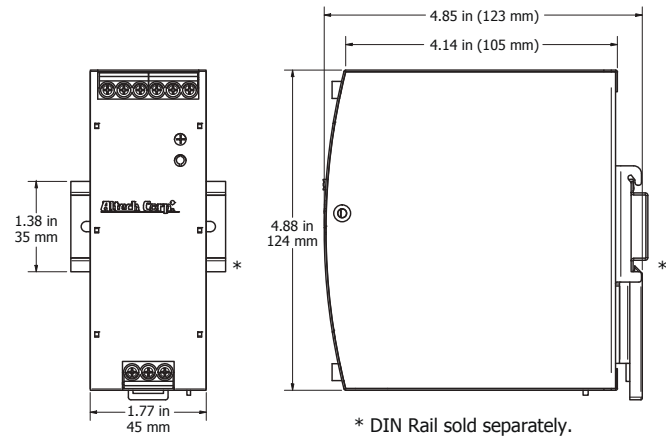


### Additional Functions

DC OK	LED V On: when output voltage is up to 90% of rated output voltage
	LED V Off: when output voltage is down to 80% of rated output voltage

## Block Diagram

## Functional Diagram

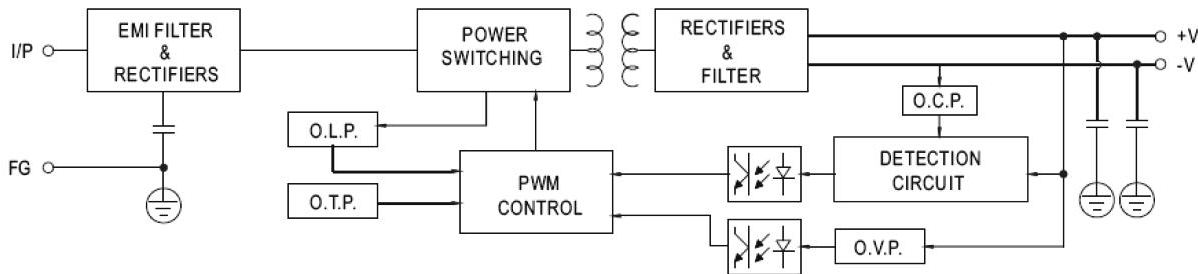

## Derating Curve

