DWG. N□. BRP-12202 ISSUE REVISIONS

MATERIAL:

PANEL MOUNTING RAILS - 14 GA. (0.08" [2.0] THK.) STEEL ALL OTHER PARTS - 18 GA. (0.05" [1.2] THK.) STEEL

FINISH:

BLACK TEXTURED POWDER COATING


PANEL MOUNTING RAILS HAVE 0.35" [8.9] SQUARE HOLES

ON E.I.A. UNIVERSAL HOLE SPACING


SUPPLIED HARDWARE KIT TO INCLUDE: QTY. (25) M6 CAGE NUT QTY. (25) M6 PAN HEAD SCREW

QTY. (25) NYLON FLAT WASHER QTY. (4) M10  $\times$  2.25" [57.2] LG. STEM LEVELER W/HEX NUT


QTY. (8) KEYS

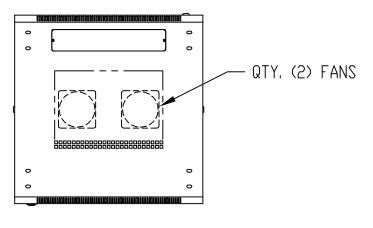



TOP VIEW

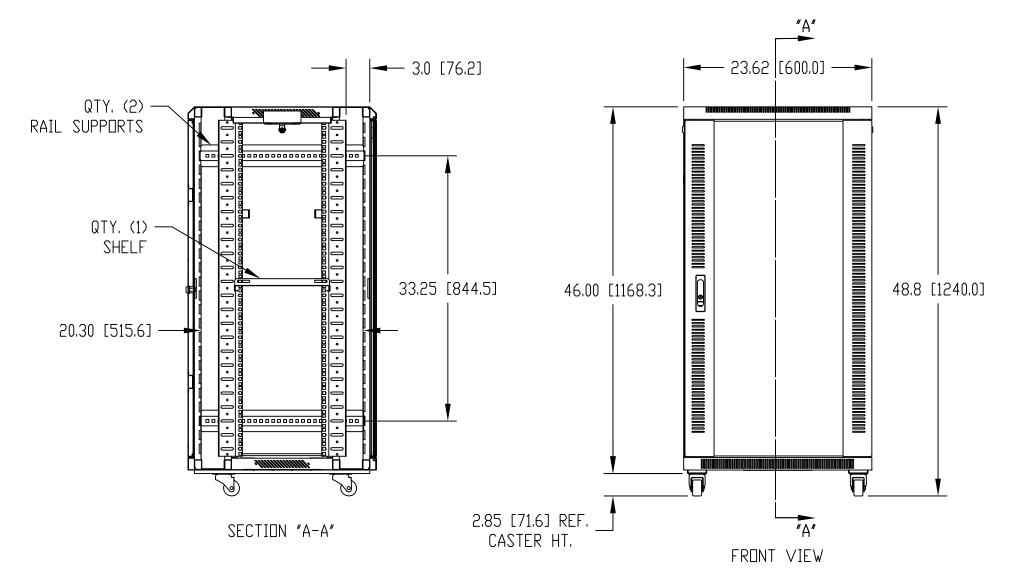

17.72 [450.0] MIN. CLEAR OPENING <u>|</u> 18.31±.08[465.0±2.0] HOLE CENTERS 41.34 [1052.0] MIN. CLEAR OPENING FRONT VIEW (DOOR REMOVED)

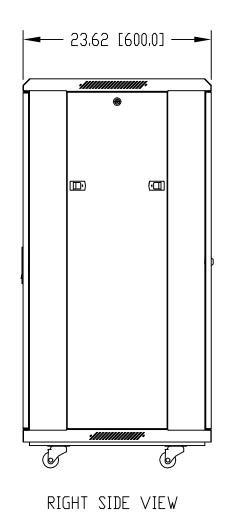

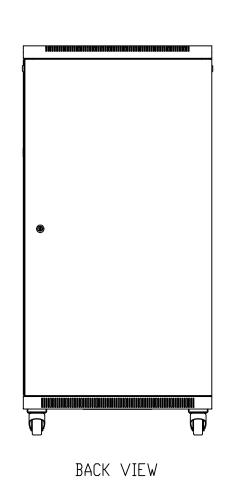



BOTTOM VIEW

TOLERANCE ALL DIMENSIONS: ±0.08" [2.0]

		ITEM REQ'D. F		PAR	T N□.	DESCRIPTION		
	TOLERANCES:	MAT:	ZA	NOTED	SCALE:		NAME:	
	±.005 BETWEEN HOLE CENTERS			NOTED	BUD		24U BUDRACK	
	T-035 FROM A BENT SURFACE	DR. D	AB 6	5-20-08	BUD INDUSTRIES, INC.		PROFESSIONAL SERIES	
	±.063 BETWEEN ASSEMBLED SURFACES	CH.					DWG.	DDD 10000
QTY. USED ON	UNLESS OTHERWISE SPECIFIED	APP.			WILLDUGH	HBY, □HI□	ND.	BRP-12202