

MATERIAL: PANEL MOUNTING RAILS - 14 GA. (0.08" [2.0] THK.) STEEL ALL OTHER PARTS - 18 GA. (0.05" [1.2] THK.) STEEL

FINISH:


BLACK TEXTURED POWDER COATING


PANEL MOUNTING RAILS HAVE 0.35" [8.9] SQUARE HOLES ON E.I.A. UNIVERSAL HOLE SPACING

SUPPLIED HARDWARE KIT TO INCLUDE: QTY. (25) M6 CAGE NUT QTY. (25) M6 PAN HEAD SCREW

QTY. (25) NYLON FLAT WASHER QTY. (4) M10 \times 2.25" [57.2] LG. STEM LEVELER W/HEX NUT

QTY. (8) KEYS

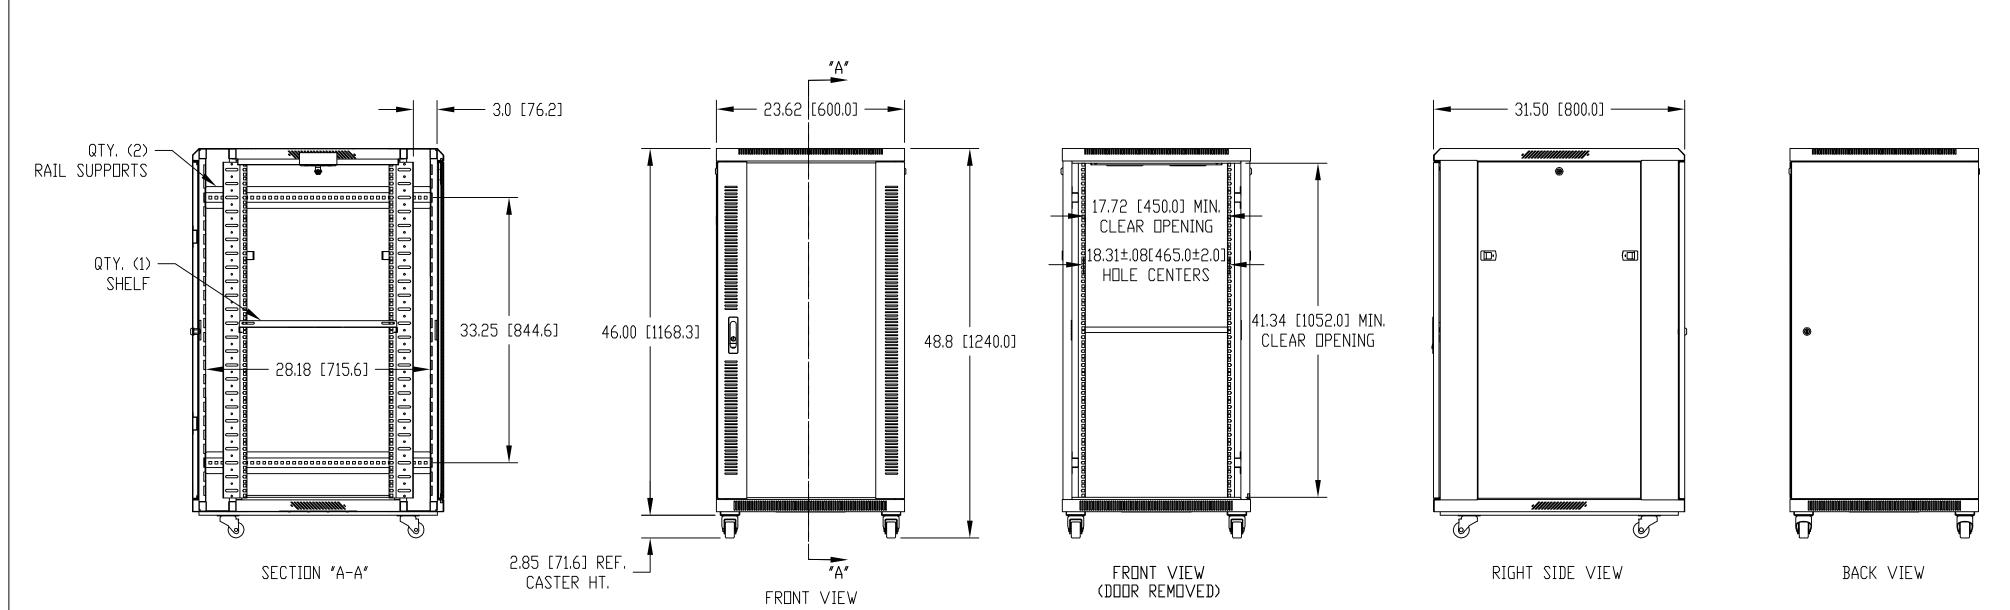



TOLERANCE ALL DIMENSIONS: ±0.08" [2.0]

		ITEM REQ'D. PAR		T N□.		DESCRIPTION	
	TOLERANCES:	MAT:	AS NOTED	SCALE:		NAME:	
	±.005 BETWEEN HOLE CENTER ±.015 FROM SHEARED EDGE ±.032 FROM A BENT SURFACE		AS NOTED	BID		24U BUDRACK PROFESSIONAL SERIES	
			6-20-08				
	±.063 BETWEEN ASSEMBLED SURFACES UNLESS OTHERWISE SPECIFIED	CH.		BUD INDUSTRIES, INC.		D) (C	
QTY. USED ON		APP.		WILLOUGHBY, OHIO	DWG. ND. BRP-12212		