


Dwyer


SERIES 783 & 784

ICE CUBE RELAYS

3PDT or 4PDT Operation

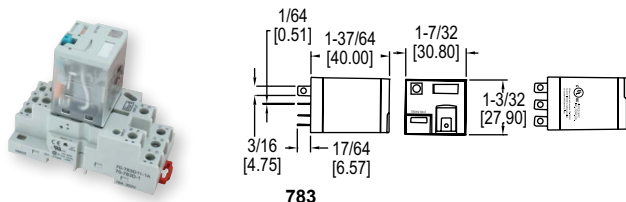

783

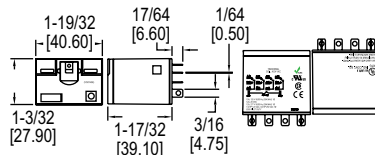

784

Pictures shown with socket accessory (sold separately)

The **Series 783 & 784 Ice Cube Relays** are full-featured relays that can be used to handle loads up to 15 amps for AC or DC circuits. It features a flag status indicator and a LED status lamp to let the user know when the relay is activated. In order to differentiate between AC and DC actuated models, the push-to-test button is color coded and a removable lock-down lever holds the test button in place.

BENEFITS/FEATURES

- Quick installation and replacement using socket mounting
- Simplified diagnosis with flag and LED status indicators and color-coded push-to-test button

APPLICATIONS

- Refrigeration compressor systems
- HVAC motor controls
- Water/wastewater pump control

MODEL CHART			
Model	Operation	Input Voltage	Coil Resistance
783XCM4L-24A	AC	24 VAC 50/60 Hz	103 Ω
783XCM4L-120A	AC	120 VAC 50/60 Hz	2770 Ω
783XCM4L-24D	DC	24 VDC	400 Ω
784DXM4L-24A	AC	24 VAC 50/60 Hz	84.5 Ω
784DXM4L-120A	AC	120 VAC 50/60 Hz	2220 Ω
784DXM4L-24D	DC	24 VDC	388 Ω

SPECIFICATIONS

Operating and Load Voltage Range: 24-240 VAC; 24 VDC.

Electrical Connection: Silver alloy plug-in contacts.

Switching Operation: 3PDT or 4PDT.

Electrical Rating: 15 A @ 120 VAC 50/60 Hz; 12 A @ 277 VAC 50/60 Hz or 28 VDC.

Temperature Limits: Storage: -40 to 185°F (-40 to 85°C); Operation: -40 to 131°F (-40 to 55°C).

Power Consumption: 783: 1.5 VA; 1.4 W; 784: 1.5 VA; 1.5 W.

Cycle Life: 100,000 cycles (electrical); 10,000,000 cycles (mechanical).

Housing: Plastic polycarbonate.

Weight: 783: 2.1 oz (60 g); 784: 2.8 oz (80 g).

Agency Approvals: CE, CSA, cULus, cURus.

ACCESSORIES

Model	Description
70-784D14-1	Socket for 784 series relay
70-ASMM-24	Protection modules, MOV suppressor, 24 VAC/VDC
70-ASMM-120	Protection modules, MOV suppressor, 120 VAC/VDC
70-ASMD-250	Protection modules, protection diode, 6 to 250 VDC