



*Quality Products. Service Excellence.*

## Type 4 Mild Steel Freestanding Enclosure 1418 N4 FS Series

Continuous Hinge Door with Clamps



### Application

- Designed to house electrical, electronic, hydraulic or pneumatic controls with provision for panel mounting or rack mounting of equipment.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in specific applications where corrosion is a serious problem.
- A variety of inner panels, rack mounting rails and swing out frames are available to provide flexibility in mounting arrangements.

### Standards

- UL 508A Type 3R, 4 and 12
- CSA Type 3R, 4 and 12
- Complies with
  - NEMA Type 3R, 4, 12 and 3
  - IEC 60529, IP66

### Construction


- Formed 12 gauge steel.
- Smooth, continuously welded seams without knockouts, cutouts or holes.
- Lifting eyes provide for easy enclosure handling.
- Doors are supported with heavy gauge continuous hinges.
- Doors are secured with heavy duty stainless steel clamps.
- Seamless poured-in place gasket.
- Provision for light kit mounting.
- Mounting channels are welded on the inside of the enclosure for mounting of optional inner panels or rack equipment rails.
- A grounding stud is provided in the enclosure and a bonding stud is provided on the door.

### Finish

- Cover and enclosure are finished in recoatable smooth ANSI 61 gray powder coating.
- Optional inner panels are available in white powder coating, or unpainted galvanized steel.

### Accessories

- |  |                                      |
|--|--------------------------------------|
| • Climate Control                      | • Blowers and Fans                   |
| • Ventilation                          | • Door Stop Kit                      |
| • Drip Shield Kit                      | • Filtered Fans                      |
| • Floor Stand Kit                      | • Gland Plates                       |
| • Heaters                              | • Inner Panels                       |
| • Lighting                             | • Type 1 Louvered Ventilating Plates |
| • Panel Rails                          | • Swing Out Frames                   |
| • Temperature Controls and Accessories | • Window Kits                        |
| • Ground Wire Kits                     |                                      |

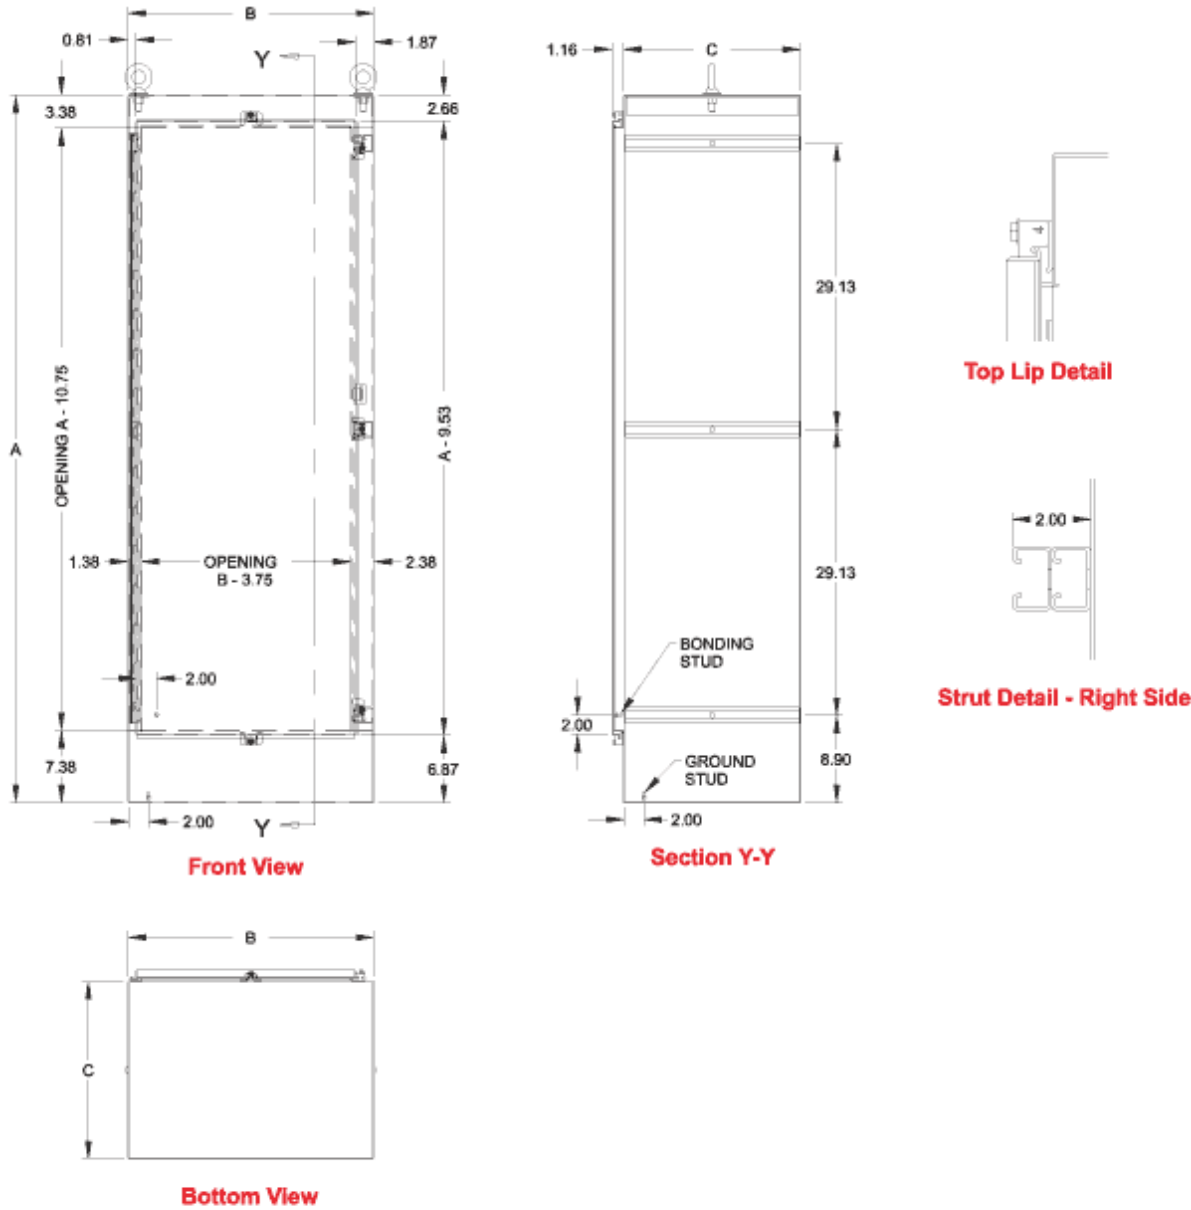

Note: 4 eyebolts are provided for 30.06" and 36.06" deep enclosures (both dual and single access)

Part No.	A	B	C	Optional Full Panel <sup>1</sup>
1418N4W18	72.06	25.06	18.06	72WFW
1418N4X24	72.06	31.06	24.06	72XFW
1418N4Y24	72.06	37.06	24.06	72YFW

<sup>1</sup> Refers to optional full height/full width panels. Depth panels/half height width panels are also available

Data subject to change without notice