



Quality Products. Service Excellence.

Type 1 Mild Steel Splitter Box *CSB Series*

Hinged Door with Screw



Application

- The splitter boxes are designed for indoor distribution of up to 600 A (max) service using either 3 or 4 wires.

Standards

- CSA Type 1
- Complies with
 - IEC 60529, IP20

Construction

- Formed and spot welded from 14 or 16 gauge steel.
- Factory installed splitter blocks.
- Series of knockouts on each side.
- Padlocking hasp.

Finish


- Enclosure and cover are finished in ANSI 61 gray powder coating.

Accessories


- Splitter Blocks
- Grounding Kits




Type 1 Mild Steel Splitter Box (CSB Series) - Hammond Mfg.

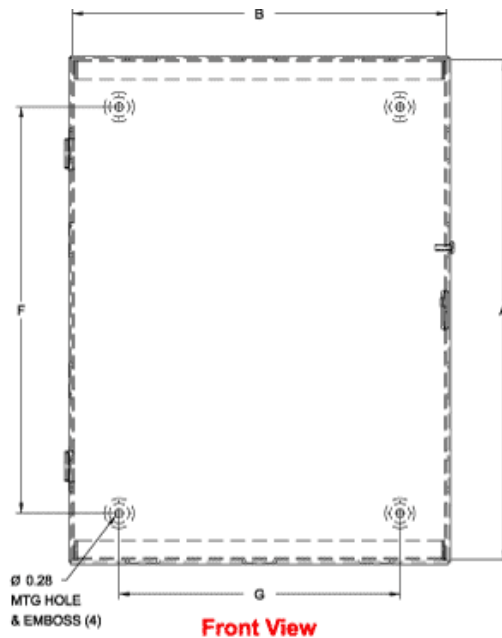

Front View

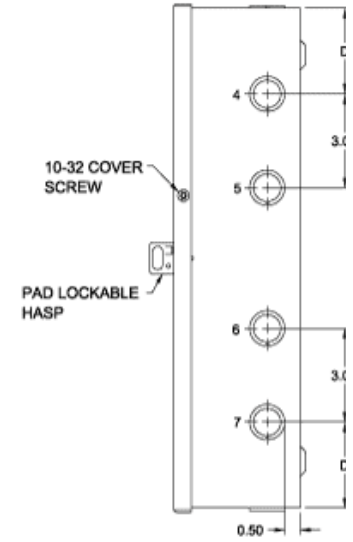

Side View

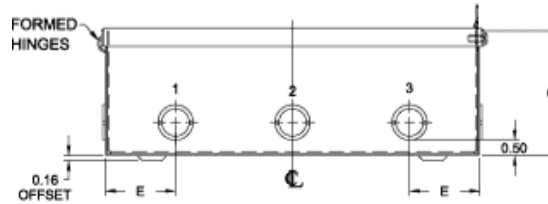

Bottom View

NOTE: KNOCKOUTS TYPICAL ON OPPOSITE SIDES

3 Wire	Part No.			CU/AL Amps	Dimensions					Conduit Size (Location)			
	4 Wire	Less Blocks			A	B	C	D	E	F	1/2" - 3/4"	3/4" - 1"	2" - 2 1/2"
CSB73	CSB74	CSB70		70/70	12.00	10.00	4.00	2.75	2.25	9.00	1,3,7	2,4	-
CSB103	CSB104	CSB100		125/120	15.00	10.00	4.00	2.75	2.25	12.00	1,2,7	2,4	-
CSB203	CSB204	CSB200		225/225	18.00	12.00	5.00	3.00	3.50	15.00	1,3,7	4	1,3
CSB403	CSB404	CSB400		400/340	24.00	17.00	6.00	3.31	4.88	21.00	-	-	-
CSB603*	CSB604*	CSB600*		600/574	30.00	24.00	7.00	4.00	5.00	27.00	-	-	-

* 14 gauge steel

Data subject to change without notice