



Quality Products. Service Excellence.

## Type 4 Mild Steel Wallmount Enclosure *HWHK Series*

Hinge Door with Handle



**Panel  
Sold  
Separately**



**Handle  
Included**



### Application

- Designed to enclose electrical and/or electronic equipment and protect against harsh, industrial environments for wallmount applications.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in outdoor applications for full weather protection.
- Ideal for processing plants, utility, outdoor municipal or petro chemical locations where easy yet secure access is required.

### Standards

- UL 508A Type 3R, 4 and 12
- CSA Type 3R, 4 and 12
- Complies with
  - NEMA 3R, 4, 12 and 13
  - IEC 60529, IP 66

### Construction


- Formed 14 gauge steel bodies and doors.
- Continuously welded seams ground smooth.
- Formed lip on enclosure to exclude flowing liquids and contaminants.
- Powder coated black zinc diecast pad lockable handle with 3 point roller latching system secures door.
- Stainless steel continuous hinge on door may be removed by pulling the stainless steel hinge pin
- Seamless poured-in place gasket.
- Collar studs provided for mounting inner panel.
- Bonding stud provided on door and grounding stud installed in enclosure.

### Finish

- Cover and enclosure are finished in recoatable smooth ANSI 61 gray powder coating interior and exterior.

### Accessories

- Inner Panels
- Blowers and Fans
- Door Stop Kit
- Floor Stand Kit
- Filterfan Rainhoods - 3R
- Gland Plates
- Type 3R Louvered Vent Kits
- Swing Panel Kit
- Temperature Controls and Accessories
- Type 12/4, 4X Handle Kits
- Climate Control
- Ventilation
- Drip Shield Kit
- Filtered Fans
- Heaters
- Gland Plates
- Terminal Kits
- Window Kits
- Hole Plugs
- Ground Wire Kits

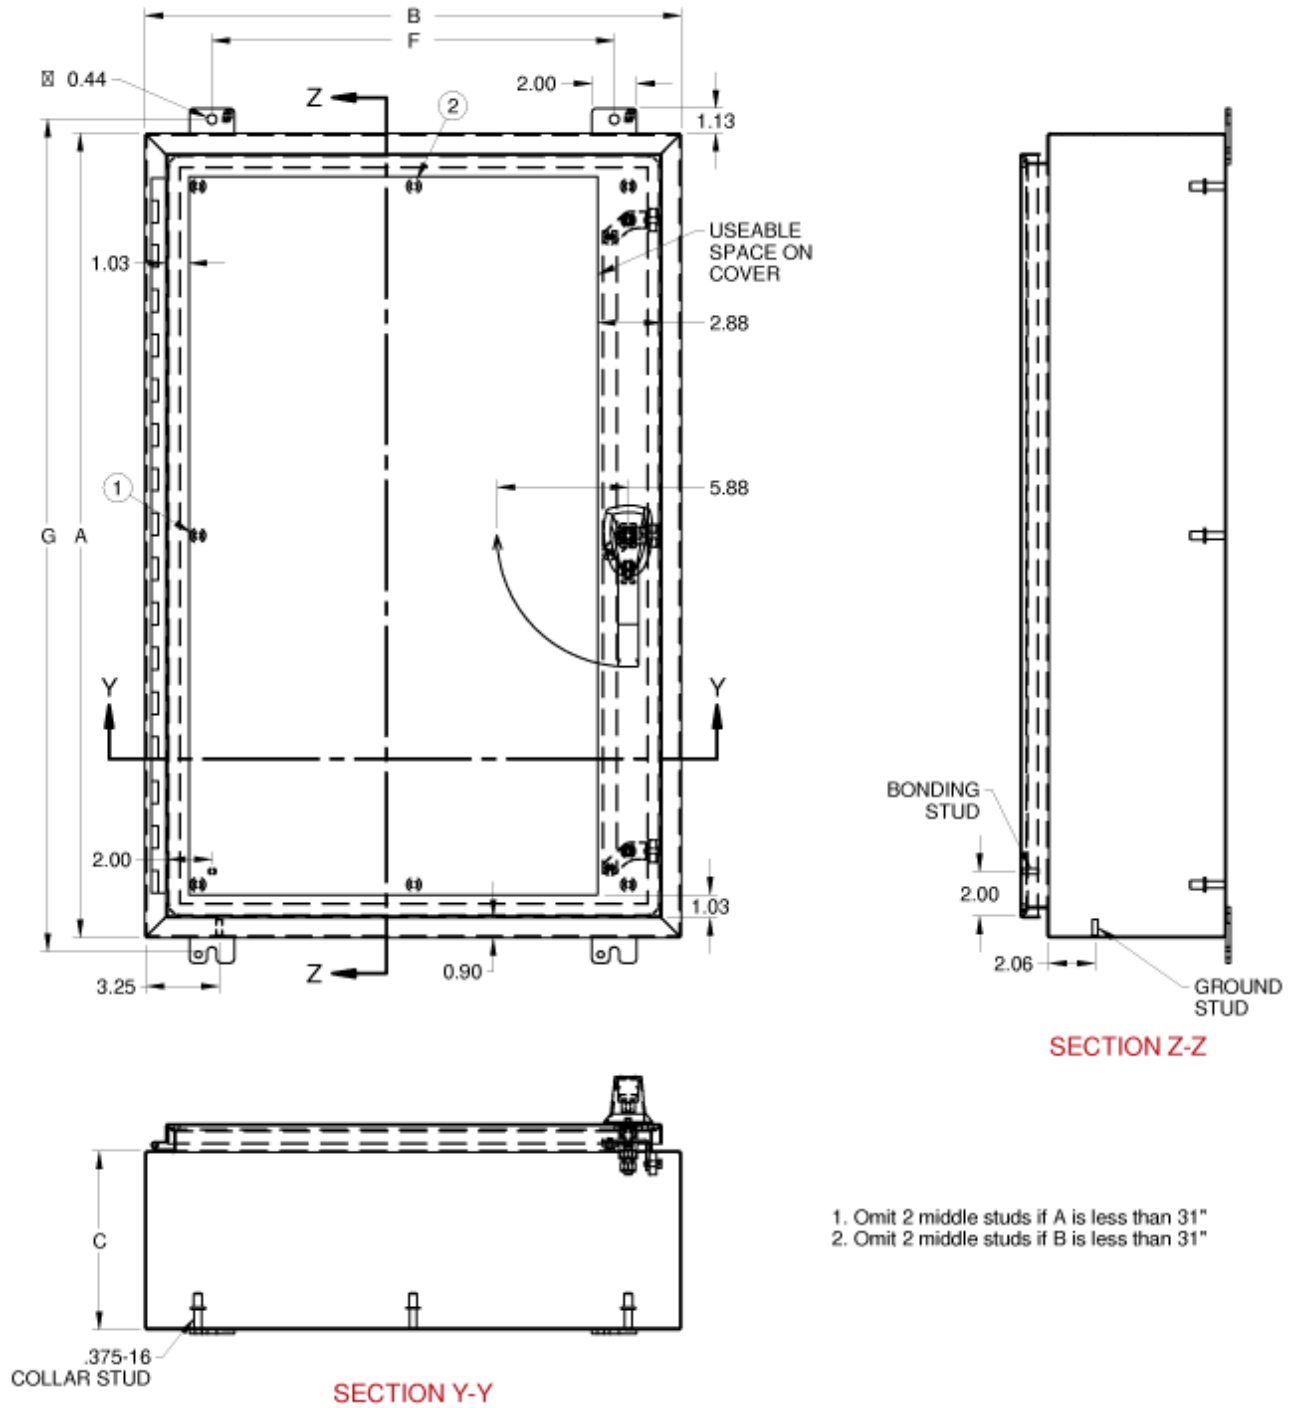

- 1. Omit 2 middle studs if A is less than 31"
- 2. Omit 2 middle studs if B is less than 31"

Part No.	Overall Dimensions			Opt. Panel	Opt. Panel	Mounting Centers	
	A	B	C	Painted Part No.	Galv. Part No.	F	G
HW24206GYHK	24.00	20.00	6.00	18P2117	18G2117	14.00	25.25
HW24246GYHK	24.00	24.00	6.00	18P2121	18G2121	18.00	25.25
HW24168GYHK	24.00	16.00	8.00	18P2113	18G2113	10.00	25.25
HW24208GYHK	24.00	20.00	8.00	18P2117	18G2117	14.00	25.25
HW24248GYHK	24.00	24.00	8.00	18P2121	18G2121	18.00	25.25
HW24308GYHK	24.00	30.00	8.00	18P2721	18G2721	24.00	25.25
HW30208GYHK	30.00	20.00	8.00	18P2717	18G2717	14.00	31.25
HW30248GYHK	30.00	24.00	8.00	18P2721	18G2721	18.00	31.25
HW30308GYHK	30.00	30.00	8.00	18P2727	18G2727	24.00	31.25
HW36248GYHK	36.00	24.00	8.00	18P3321	18G3321	18.00	37.25
HW36308GYHK	36.00	30.00	8.00	18P3327	18G3327	24.00	37.25
HW42368GYHK	42.00	36.00	8.00	18P3933	18G3933	30.00	43.25
HW48368GYHK	48.00	36.00	8.00	18P4533	18G4533	30.00	49.25

Part No.	Overall Dimensions			Opt. Panel	Opt. Panel	Mounting Centers	
	A	B	C	Painted Part No.	Galv. Part No.	F	G
HW242010GYHK	24.00	20.00	10.00	18P2117	18G2117	14.00	25.25
HW302410GYHK	30.00	24.00	10.00	18P2721	18G2721	18.00	31.25
HW362410GYHK	36.00	24.00	10.00	18P3321	18G3321	18.00	37.25
HW363010GYHK	36.00	30.00	10.00	18P3327	18G3327	24.00	37.25
HW423010GYHK	42.00	30.00	10.00	18P3927	18G3927	24.00	43.25
HW483610GYHK	48.00	36.00	10.00	18P4533	18G4533	30.00	49.25
HW242412GYHK	24.00	24.00	12.00	18P2121	18G2121	18.00	25.25
HW302412GYHK	30.00	24.00	12.00	18P2721	18G2721	18.00	31.25
HW363012GYHK	36.00	30.00	12.00	18P3327	18G3327	24.00	37.25
HW363612GYHK	36.00	36.00	12.00	18P3333	18G3333	30.00	37.25
HW423612GYHK	42.00	36.00	12.00	18P3933	18G3933	30.00	43.25
HW483612GYHK	48.00	36.00	12.00	18P4533	18G4533	30.00	49.25
HW603612GYHK	60.00	36.00	12.00	18P5733	18G5733	30.00	61.25
HW302416GYHK	30.00	24.00	16.00	18P2721	18G2721	18.00	31.25
HW363016GYHK	36.00	30.00	16.00	18P3327	18G3327	24.00	37.25
HW483616GYHK	48.00	36.00	16.00	18P4533	18G4533	30.00	49.25
HW603616GYHK	60.00	36.00	16.00	18P5733	18G5733	30.00	61.25

*Data subject to change without notice*

© 2018. Hammond Manufacturing Ltd. All rights reserved.