



*Quality Products. Service Excellence.*

## Type 4X Polyester Single/Two Door Freestanding Enclosure *PJFS Series*

Continuous Hinge Door with Handle



### Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides outstanding insulation and protection where equipment may be hosed down or be very wet.
- Ideal in applications with high temperatures or highly corrosive environments.

### Standards



- UL/cUL 508A Type 1, 2, 3, 4, 4X, 12 and 13
- Complies with
  - IEC 60529, IP66
  - NEMA Type 1, 2, 3, 4, 4X, 12 and 13

### Construction

- Fiberglass polyester enclosure with matching door is easily punched, cut, or drilled.
- Enhanced UV inhibitors protect against outdoor weathering.
- Collar Studs are provided for optional inner panel.
- Mounting hardware included.
- Heavy duty continuous 304 SS Hinge.
- Flexible self-gripping gasket compresses over flange for tight seal.
- 3-point SS handle with pad lock provision.
- Molded in drip shield.
- Fiberglass mounting strut side walls on double door unit.
- Operating temperatures between 130°C and -40°C (266°F to -40°F).
- Impact index of 6.78J (5 ft/lb).
- For corrosion resistance information, please refer to table in the Technical Information section.

### Finish

- Fiberglass polyester material has a gray finish.
- Optional inner panels are available in white powder coated finished steel.

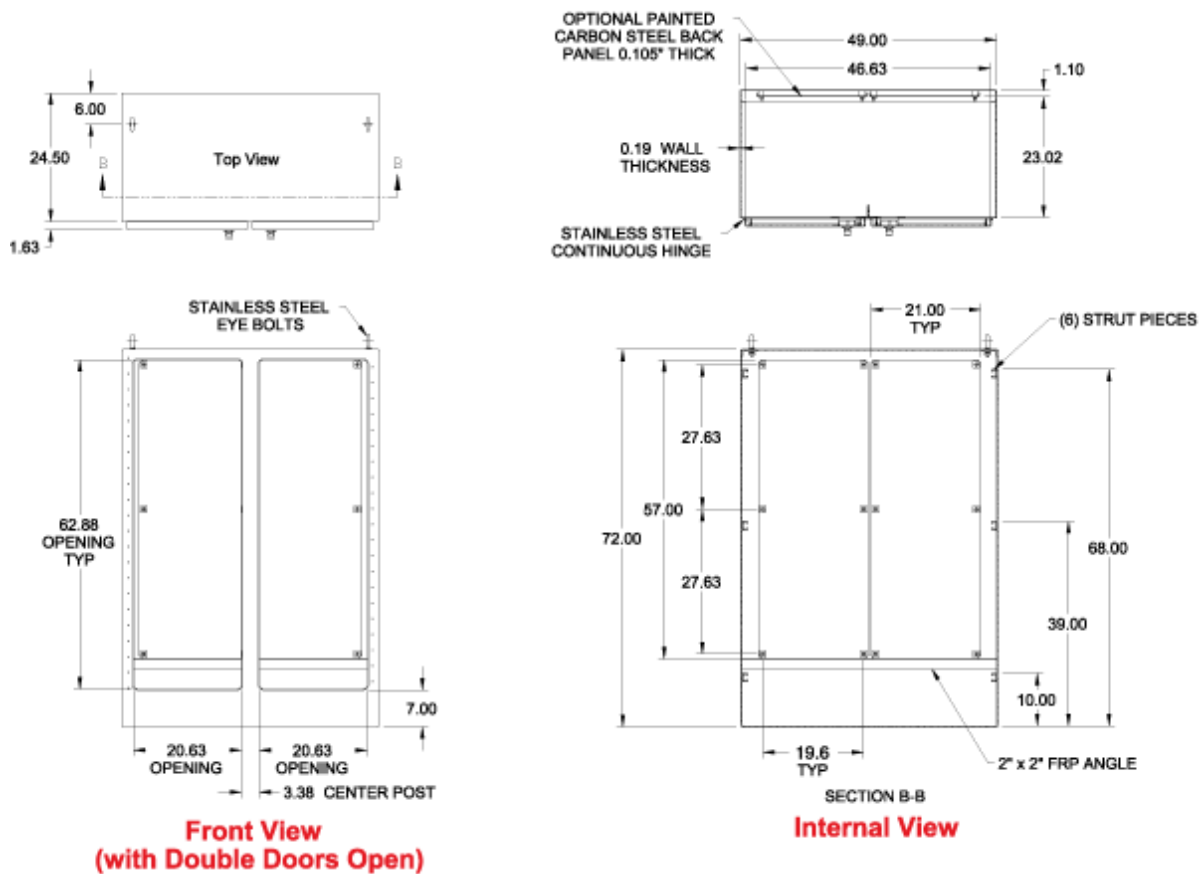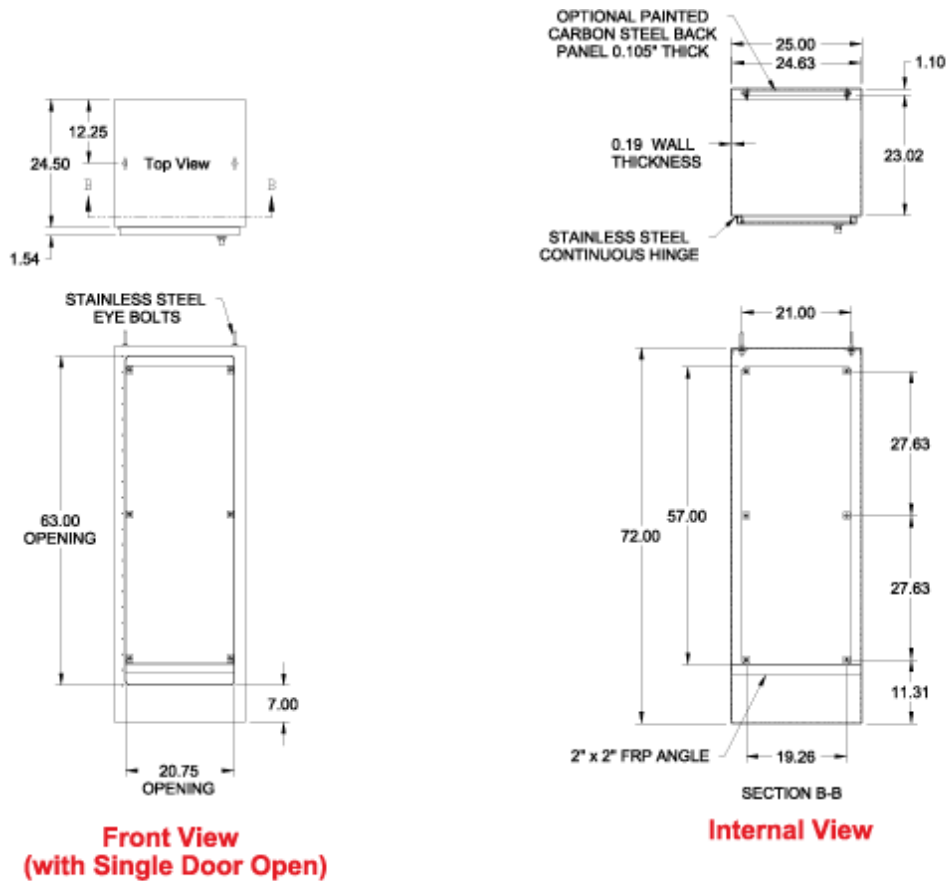

Enclosure					Panel				
Part No.	Height	Width	Depth	Ship Wt (lbs)	Panel Part No.	Height	Width	Notes	Finish
PJFS722525	72.00	25.00	24.50	215	18P5721	57.00	21.00	Qty 1 Required	White

Enclosure					Panel				
Part No.	Height	Width	Depth	Ship Wt (lbs)	Panel Part No.	Height	Width	Notes	Finish
PJFS724925DD	72.00	48.00	24.50	430	18P5721	57.00	21.00	Qty 2 Required	White

Data subject to change without notice

© 2018. Hammond Manufacturing Ltd. All rights reserved.