



*Quality Products. Service Excellence.*

## Type 4X Polyester Wallmount Enclosure *PJW Series*

Continuous Hinge Door with Twist Latches and 3 Pt Handle



**Panel  
Sold  
Separately**



### Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides outstanding insulation and protection where equipment may be hosed down or be very wet.
- Ideal in applications with high temperatures or highly corrosive environments.

### Standards

- UL/cUL 508A Type 1, 2, 3, 4, 4X, 12 and 13
- CSA Type 1, 2, 3, 4, 4X, 12 and 13
- Complies with
  - NEMA Type 1, 2, 3, 4, 4X, 12 and 13
  - IEC 60529, IP66

### Construction

- Molded fiberglass polyester enclosure with matching cover is easily punched, cut, or drilled.
- Enhanced UV inhibitors protect against outdoor weathering.
- 3/8 collar studs are provided for optional inner panel mounting, hardware included.
- Stainless steel butterfly type "twist latch" door fasteners with padlock provision.
- Captive oil resistant gasket provides a positive seal.
- Integrated mounting flange.
- Operating temperatures between 130°C and -40°C (266°F to -40°F).
- Impact index of 6.78J (5 ft/lb).
- For corrosion resistance information, please refer to table in the Technical Information section.

### Finish


- Fiberglass polyester material has a gray finish.
- Optional inner panels are available in white powder coated finished steel.

### Accessories


- Inner Panels
- Terminal Kit Assemblies



**Front View**

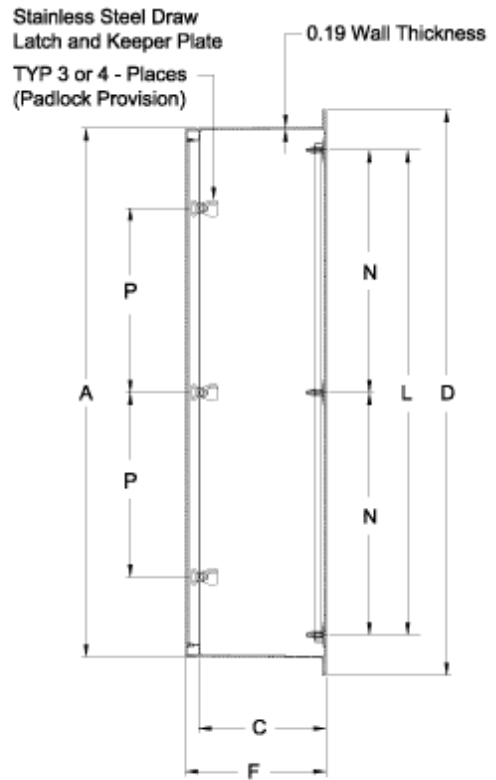

**Side View**

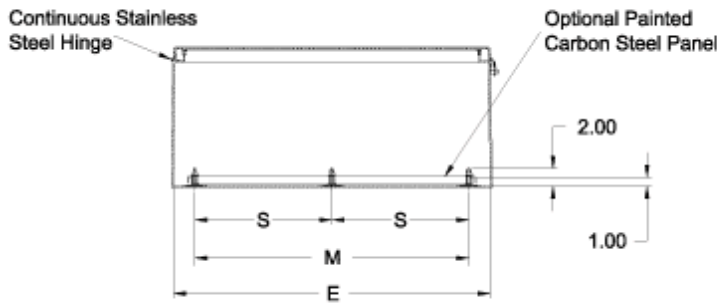

**End View**

Latch Part No.	3 Pt Handle Part No.	Overall Dimensions						Mounting Centers				
		A	B	C	D	E	F	G	H	I	J	K
PJEC363012T	PJEC3630123PT	36.48	30.50	12.18	41.51	31.76	12.30	39.60	24.00	12.00	33.30	27.30
PJEC363012TW	PJEC3630123PTW	36.48	30.50	12.18	41.51	31.76	12.30	39.60	24.00	12.00	33.30	27.30
PJW363014L	PJW363014L3PT	36.25	30.25	14.13	40.50	30.50	16.00	38.90	24.00	12.00	33.88	27.88
PJW363610L	PJW363610L3PT	36.25	36.25	10.13	40.50	36.50	12.00	38.90	30.00	15.00	33.88	33.88
PJW363614L	PJW363614L3PT	36.25	36.25	14.13	40.50	36.50	16.00	38.90	30.00	15.00	33.88	33.88
PJW483610L	PJW483610L3PT	48.25	36.25	10.13	52.50	36.50	12.00	50.90	30.00	15.00	45.38	33.88
PJW483614L	PJW483614L3PT	48.25	36.25	14.13	52.50	36.50	16.00	50.90	30.00	15.00	45.38	33.88
PJW603610L	PJW603610L3PT	60.25	36.25	10.13	64.50	36.50	12.00	62.90	30.00	15.00	57.38	33.88
PJW603614L	PJW603614L3PT	60.25	36.25	14.13	64.50	36.50	16.00	62.90	30.00	15.00	57.38	33.88

Parts ending in W have window

Latch Part No.	3 Pt Handle Part No.	Panel Size				# of Latches	# of Panel Mount Studs	Panel Size		Opt. Panel Part No.
		M	N	S	P			Height	Width	
PJEC363012T	PJEC3630123PT	25.25	15.63	12.63	12.13	3	6	33.00	27.00	18P3327
PJEC363012TW	PJEC3630123PTW	25.25	15.63	12.63	12.13	3	6	33.00	27.00	18P3327
PJW363014L	PJW363014L3PT	25.25	15.63	12.63	12.13	3	6	33.00	27.00	18P3327
PJW363610L	PJW363610L3PT	31.25	15.63	15.63	12.13	3	8	33.00	33.00	18P3333

Latch Part No.	3 Pt Handle Part No.	M	N	S	P	# of Latches	# of Panel Mount Studs	Panel Size Height Width		Opt. Panel Part No.
PJW363614L	PJW363614L3PT	31.25	15.63	15.63	12.13	3	8	33.00	33.00	18P3333
PJW483610L	PJW483610L3PT	31.25	21.63	15.63	18.13	3	8	45.00	33.00	18P4533
PJW483614L	PJW483614L3PT	31.25	21.63	15.63	18.13	3	8	45.00	33.00	18P4533
PJW603610L	PJW603610L3PT	31.25	27.63	15.63	16.00	4	8	57.00	33.00	18P5733
PJW603614L	PJW603614L3PT	31.25	27.63	15.63	16.00	4	8	57.00	33.00	18P5733

Parts ending in W have window

*Data subject to change without notice*

© 2018. Hammond Manufacturing Ltd. All rights reserved.