
Cabinet "U" Handles

Round Stainless Steel, with Back-to-Back Mounting Capability







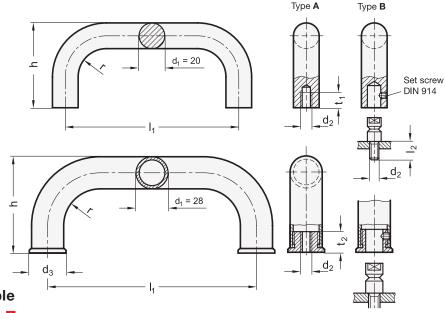

Type

- A Mounting from the back (tapped blind hole)
- B Mounting from the operator's side

Metric table

Ū	2						Dimensions in: millimeters - inches			
d₁	I ₁ ±0.5 Type A	±0.3 Type B Tapped hole for mounting stud	d ₂ Thread	d ₃	h	l ₂	r≈	t ₁	t ₂	
20 .79	200 7.87	200 7.87	M 8	-	68 2.68	20 .79	.87	15 .59	-	
20 .79	250 9.84	250 9.84	M 8	-	68 2.68	20 .79	.87	15 .59	-	
20 .79	300 11.81	300 11.81	M 8	-	68 2.68	20 .79	22 .87	15 .59	-	
20 .79	350 13.78	350 13.78	M 8	-	68 2.68	20 .79	.87	15 .59	-	
28 1.10	250 9.84	250 9.84	M 10	32 1.26	90 3.54	20 .79	32 1.26	-	17 .67	
28 1.10	300 11.81	300 11.81	M 10	32 1.26	90 3.54	20 .79	32 1.26	-	17 .67	
28 1.10	350 13.78	350 13.78	M 10	32 1.26	90 3.54	20 .79	32 1.26	-	17 .67	
28 1.10	400 <i>15.75</i>	400 <i>15.75</i>	M 10	32 1.26	90 <i>3.54</i>	20 .79	32 1.26	-	17 .67	

Specification

- Stainless steel
 European Standard No. 1.4301 (AISI 304),
 matte shot-blasted finish
 d₁ = 20: solid material
- Tapped insert / mounting stud Stainless steel European Standard No. 1.4305 (AISI 303)
- Set screw (Type B)
 d₁= 20: DIN 914-M5-6-NI
 d₁= 28: DIN 914-M6-8-NI

 $d_1 = 28$: tube Ø 28x2 mm

RoHS compliant

Information

GN 426.5 cabinet "U" handles can be mounted from the back (type A) as well as from the operator's side (type B). In this case the stud is first screwed in from the machine side and then the handle is pushed on and secured with the set screw.

Both mounting methods allow the mounting of a pair of handles in opposite position. This method could be used e.g. on doors (double handle). In general, a mounting stud with special length I_2 might be required.

The manufacturing process (bending) allows the production of special lengths in relatively small quantities.

see also...

- Cabinet "U" Handles GN 426 (Aluminum)
- Tubular Grip Handles GN 666.5 / GN 666.7 (Stainless Steel)

On request

- Special lengths
- Various metric size fasteners and kit packaging

How to order	1	Handle diameter d₁
7 2 3	2	Length I ₁
GN 426.5-28-400-A	3	Туре