



Product designation

Pushbutton
actuator, spring
return
LPCB10

Product type designation

General characteristics

Colour	Blue
Material	Polyamide
IEC degree of protection	IP66, IP67 and IP69K

Mechanical features

Operating force	kg-lb	<0.5Kg / 1.1lb
Mechanical life - spring return actuators	cycles	5000000
Mechanical life - Push-Push actuators	cycles	500000
Operating position	allowable	Any

Fixing

Flush (without
mounting
adapter)

Mounting adapter

LPXAU120

Weight

g

25

UL technical data

UL degree of protection

Type1, 2, 3R, 4,
4X, 12, 12K

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+85

Dimensions

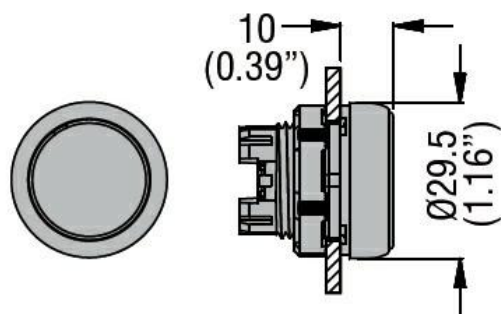

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA