
ENERGY AND AUTOMATION

electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0



Product designation Product type designation	on			Selector switch actuator key - 3 position LPCS35
General characteristics				
Type of positions				1 > 0 - 2, key extraction in 0
Material				Polyamide
IEC degree of protection				IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
D:		max	°C	+85

Dimensions

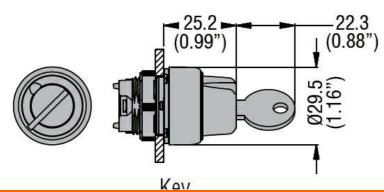

Certifica	tions and	compl	iance

Com	oliance
00111	Jiiaiioo

CSA C22.2 n° 14	
IEC/EN 60947-1	
IEC/EN 60947-5-1	
UL508	

Certificates

CCC
cULus





electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 > 0 - 2 WITH
DIFFERENT KEY CODE. WITHDRAL AT 0

ENERGY AND AUTOMATION