
ENERGY AND AUTOMATION

electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0



Product designation Product type designation			Selector switch actuator key - 3 position LPCS36
General characteristics			
Type of positions			1 - 0 < 2, key extraction in 0
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Mechanical life		cycles	1000000
Mounting adapter			LPXAU120
Weight		g	60
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			_
	min	°C	-40
Diversions	max	°C	+85

Dimensions

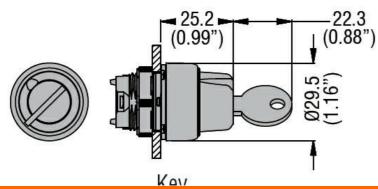

Certi	ticatio	ns and	compl	ianca

Com	oliance
00111	Jiiaiioo

CSA C22.2 n° 14	
IEC/EN 60947-1	
IEC/EN 60947-5-1	
UL508	

Certificates

CCC cULus





electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0

ENERGY AND AUTOMATION