




Product designation Product type designation		Selector switch actuator key - 3 position LPCS37
General characteristics		
Type of positions		1 > 0 < 2, key extraction in 0
Material		Polyamide
IEC degree of protection		IP66, IP67 and IP69K
Mechanical features		
Mechanical life	cycles	1000000
Mounting adapter		LPXAU120
Weight	g	60
UL technical data		
UL degree of protection		Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions		
Temperature		

Operating temperature

e per a mig ter i per a tai e				
	min	°C	-25	
	max	°C	+70	
Storage temperature				
	min	°C	-40	
	max	°C	+85	

Dimensions

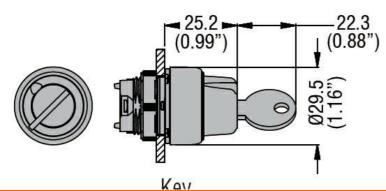

Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	CCC
	cULus

0 electric ENERGY AND AUTOMATION

LPCS370R520E SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 > 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0