
ENERGY AND AUTOMATION

electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1



Product designation Product type designation	on			Selector switch actuator key - 3 position LPCS39
General characteristics				
Type of positions				1 - 0 < 2, key extraction in 1
Material				Polyamide
IEC degree of protection	on			IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Discounting				

Dimensions

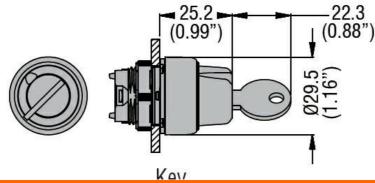

Certi	ticatio	ns and	compl	ianca

Com	oliance
00111	Jiiaiioo

CSA C22.2 n° 14	
IEC/EN 60947-1	
IEC/EN 60947-5-1	
UL508	

Certificates

CCC cULus





electric SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

ENERGY AND AUTOMATION