



Product designation

Illuminated  
selector switch  
actuator - 2  
position  
LPCSL12

Product type designation

#### General characteristics

|                          |                      |
|--------------------------|----------------------|
| Colour                   | Blue                 |
| Type of positions        | 0 - 1                |
| Material                 | Polyamide            |
| IEC degree of protection | IP66, IP67 and IP69K |

#### Mechanical features

|                  |       |                |
|------------------|-------|----------------|
| Operating force  | kg-lb | <0.5Kg / 1.1lb |
| Mounting adapter |       | LPXAU120       |
| Weight           | g     | 25             |

#### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

#### Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

#### Dimensions

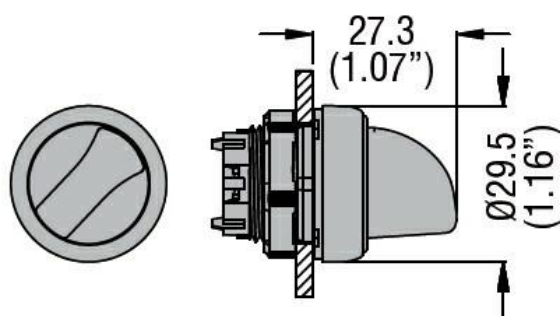

#### Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL508

Certificates

CCC  
cULus

---

EAC

---

RINA