



Contact elements  
- without mountin  
adapter  
LPXC

## Product designation

## Product type designation

## Operations

Electrical life	hours	1000000
-----------------	-------	---------

## Mechanical features

Operating force	kg-lb	≤0.5Kg/1.1lb
Tightening torque for terminals max	Nm	1
Terminals screw		Screw
Conductor section		

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

Mounting adapter		LPXAU120
------------------	--	----------

Weight	g	22
--------	---	----

## Ambient conditions

### Temperature



Operating temperature

min	°C	-25
max	°C	+70


Storage temperature

min	°C	-40
max	°C	+85

## Dimensions

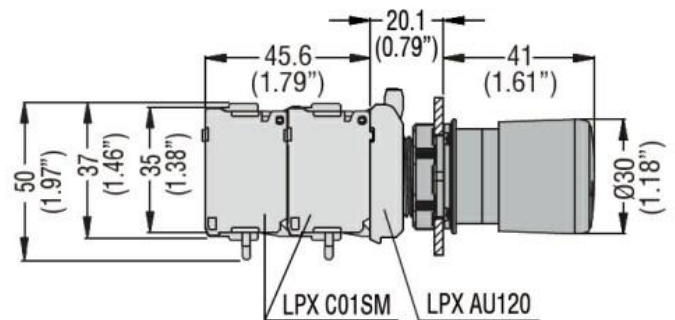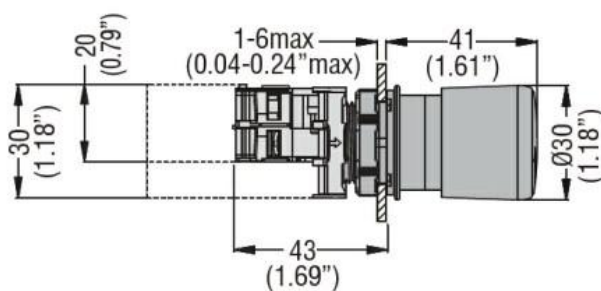

## Wiring diagrams

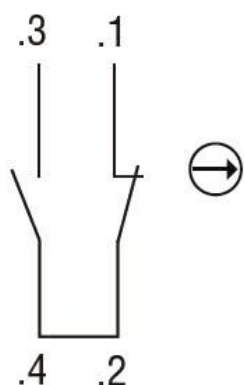

## Certifications and compliance

### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

### Certificates

CCC

cULus

EAC

RINA

UL