



Product designation

Product type designation

Contact elements  
- without mountin  
adapter  
LPXC

### Operations

Electrical life	hours	1000000
-----------------	-------	---------

### Mechanical features

Operating force	kg-lb	≤0.5Kg/1.1lb
-----------------	-------	--------------

Tightening torque for terminals max	Nm	1
-------------------------------------	----	---

Terminals screw	Screw
-----------------	-------

Conductor section

AWG/kcmil conductor section

max	14
-----	----

IEC

max	mm²	1 or 2 / 2.5
-----	-----	--------------

Mounting adapter	LPXAU120
------------------	----------

Weight	g	11
--------	---	----

### Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+85

### Dimensions

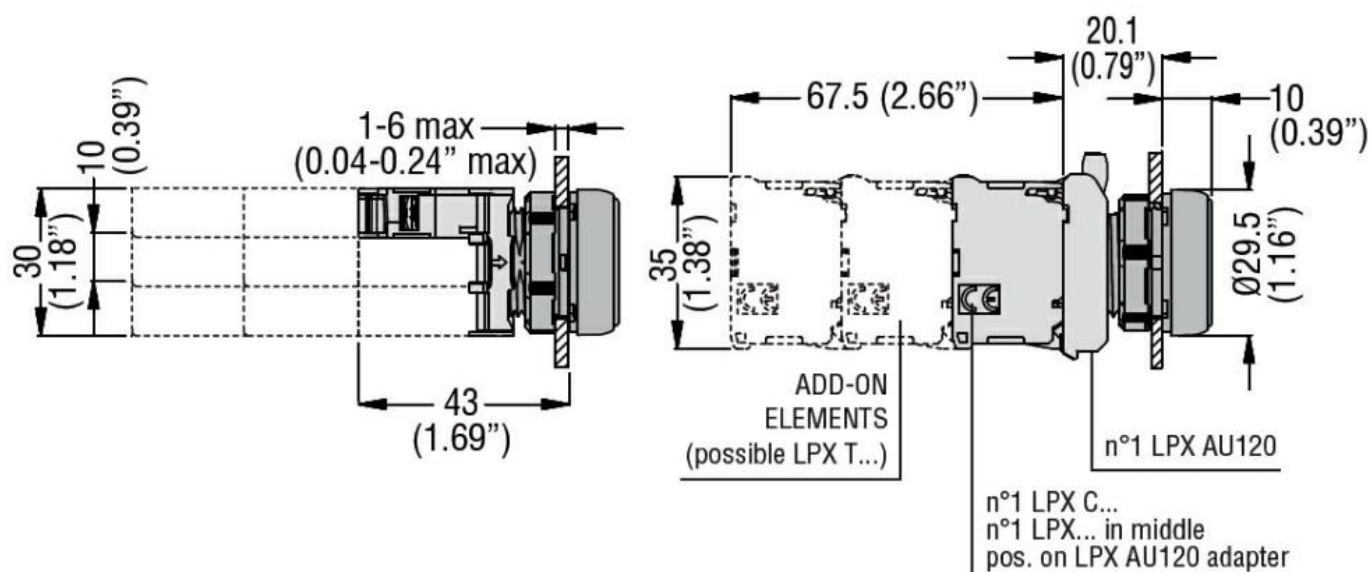

### Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC
RINA