



Contact elements
- without mountin
adapter
LPXC

Product designation

Product type designation

Operations

Electrical life hours 1000000

Mechanical features

Operating force kg-lb ≤0.5Kg/1.1lb

Tightening torque for terminals max Nm 1

Terminals screw Faston

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm² 1 or 2 / 2.5

Mounting adapter LPXAU120

Weight g 12

Ambient conditions

Temperature

Operating temperature

min °C -25


max °C +70

Storage temperature


min °C -40

max °C +85

Dimensions

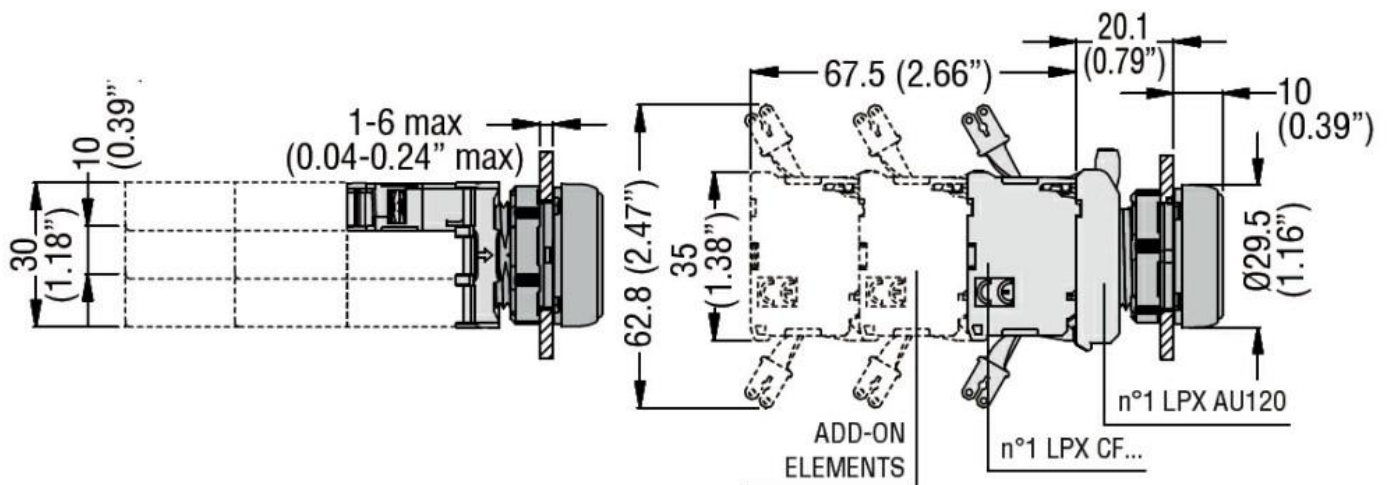

Wiring diagrams

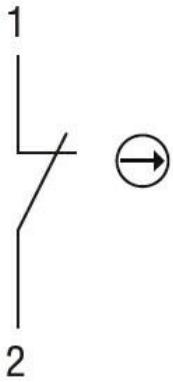

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

UL