



## Product designation

## Product type designation

Contact elements  
with spring-clamp  
terminals  
LPXCS

## Electrical characteristics

Rated insulation voltage $U_i$ IEC/EN	V	690
IEC Conventional free air thermal current $I_{th}$	A	10
Conductivity		1mA 5V
UL/CSA and IEC/EN 60947-5-1 designation		A600 Q600
Operating current AC15		

12V	A	6
24V	A	6
48V	A	6
120V	A	6
240V	A	3
400V	A	1.9
480V	A	1.5
500V	A	1.4
600V	A	1.2

## Operating current DC13

12V	A	3
24V	A	3
48V	A	1.5
125V	A	0.55
250V	A	0.27
440V	A	0.15
500V	A	0.13
600V	A	0.1

Contact resistance	mΩ	≤20
--------------------	----	-----

## Operations

Electrical life	hours	1000000
-----------------	-------	---------

## Mechanical features

Operating force	kg-lb	≤0.5kg/1.1lb
Terminals screw		Spring clamps
Mounting adapter		LPXAU120
Weight	g	10

## Ambient conditions

### Temperature


#### Operating temperature

min	°C	-25
max	°C	+70

#### Storage temperature

min	°C	-40
max	°C	+85

## Dimensions

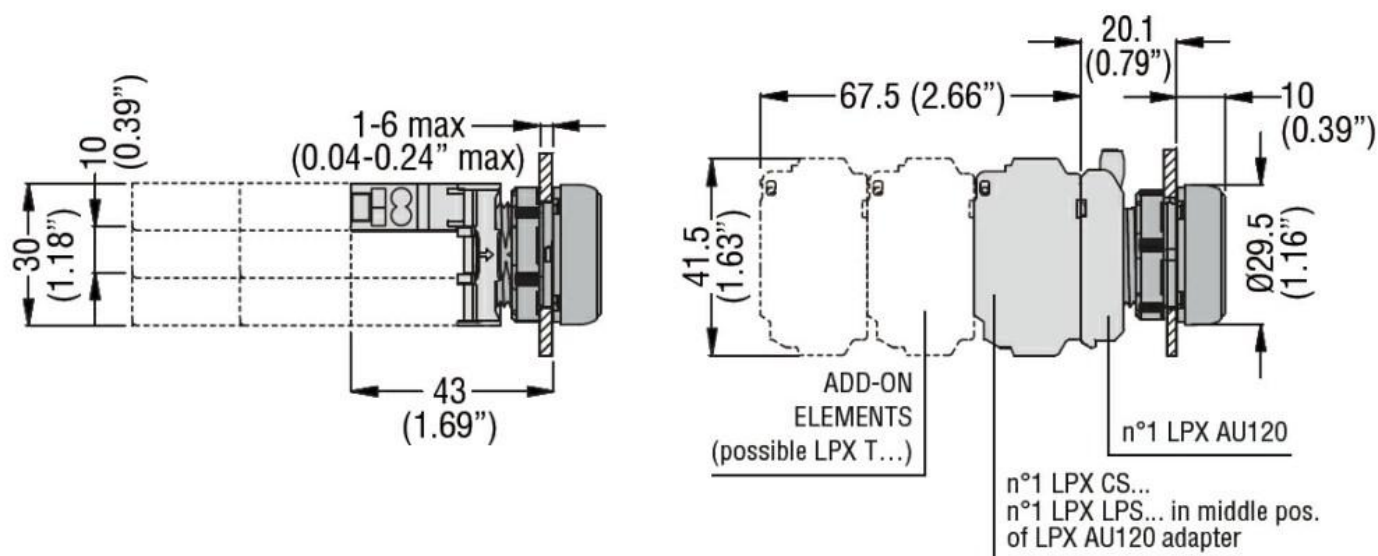

## Wiring diagrams



## Certifications and compliance

### Compliance

CSA C22.2 n° 14  
IEC/EN 60947-1  
IEC/EN 60947-5-1  
UL508

### Certificates

CCC  
cULus  
EAC  
RINA  
UL