




Product designation				LED elements steady light
Product type designat	ion			LPXLP
General characteristic	S			
Colour				Green
Electrical characteristi	CS			
Supply voltage (AC)			V	1230
Supply voltage (DC)			V	1230
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
	AWG/kcmil conductor section			
		max		12
	IEC			
		max	mm²	1 or 2 / 2.5
Mounting adapter				LPXAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimensions				



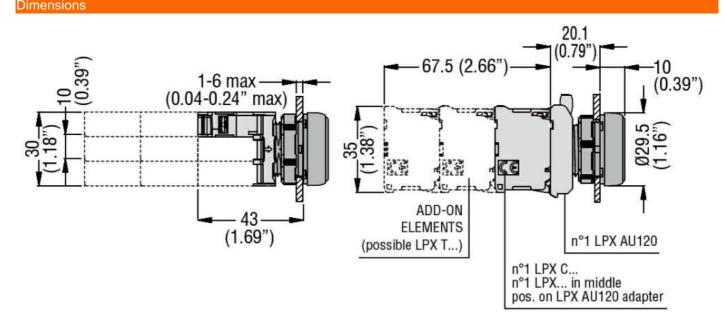

ENERGY AND AUTOMATION

Certifications and compliance

## Compliance

Certificates

X5

IEC/EN 60947-1	
IEC/EN 60947-5-1	
UL508	
CCC	
cULus	
EAC	
EAC RINA	