

Product designation




LED elements steady light base mount on LPZ control station LPXLPB

				control station
Product type designat				LPXLPB
General characteristic	S			
Colour				Red
Electrical characteristi	ics			
Rated frequency			Hz	50-60
Supply voltage (AC)			V	1230
Operations				
Electrical life			hours	100000
Mechanical features				
Conductor section				
	AWG/kcmil conductor section			
		max		14
	IEC			
		max	mm²	1 or 2 / 2.5
Mounting adapter				LPXAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimoncione				


Dimensions



Mounting position on the LPZ control station base

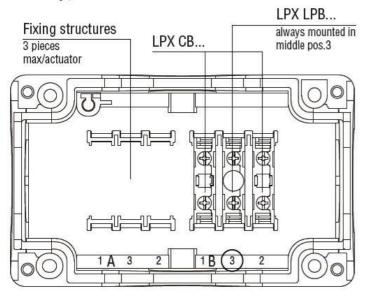

Wiring diagrams



Certifications and	l compliance	
Compliance		
	CSA C22.2 n° 14	
	IEC/EN 60947-1	
	IEC/EN 60947-5-1	
	UL508	
Certificates		
	CCC	
	cULus	
	EAC	
	RINA	
	111	

UL