

## EnviroLine® Series Wall-Mount Enclosures with 3-Point Hardware

### Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor or outdoor locations. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -

- 0.075" carbon steel.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Concealed hinges.
- Removable and interchangeable doors.
- Black zinc die cast keylocking/padlocking handles.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket.
- Oil and water resistant gasket.
- Ground stud on door and body.
- Provision for Lifting Lugs included on enclosures with Height >48" and with Depth >16". Lifting Lug assembly included with the enclosure bolt pack.

### Finish -

ANSI-61 gray powder coated inside and out.  
Optional sub-panels powder coated white.

### IS4 - Industry Standards -

NEMA Type 3R, 4, 12 & Type 13  
UL Listed Type 3R, 4 & 12  
CSA Type 3R, 4 & 12  
IEC 60529 IP66

\*\*\*Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

## ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE E3						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-24EL2010LPPL	24.00	20.00	10.00	IS4	403.89	SCE-24P20	21.00	17.00	45.57
SCE-24EL2410LPPL	24.00	24.00	10.00	IS4	426.04	SCE-24P24	21.00	21.00	53.18
SCE-30EL2412LPPL	30.00	24.00	12.00	IS4	477.70	SCE-30P24	27.00	21.00	63.29
SCE-30EL3012LPPL	30.00	30.00	12.00	IS4	534.28	SCE-30P30	27.00	27.00	83.55
SCE-36EL2412LPPL	36.00	24.00	12.00	IS4	515.83	SCE-36P24	33.00	21.00	75.96
SCE-36EL3012LPPL	36.00	30.00	12.00	IS4	563.81	SCE-36P30	33.00	27.00	101.27
SCE-42EL3612LPPL	42.00	36.00	12.00	IS4	662.22	SCE-42P36	39.00	33.00	136.72
SCE-48EL3612LPPL	48.00	36.00	12.00	IS4	711.44	SCE-48P36	45.00	33.00	154.46
SCE-48EL3616LPPL	48.00	36.00	16.00	IS4	769.25	SCE-48P36	45.00	33.00	154.46
SCE-60EL3612LPPL	60.00	36.00	12.00	IS4	809.85	SCE-60P36	57.00	33.00	189.89
SCE-60EL3616LPPL	60.00	36.00	16.00	IS4	876.28	SCE-60P36	57.00	33.00	189.89
SCE-60EL3624LPPL	60.00	36.00	24.00	IS4	1,238.73	SCE-60P36	57.00	33.00	189.89
SCE-72EL3624LPPL	72.00	36.00	24.00	IS4	1,404.61	SCE-72P36	69.00	33.00	225.33




Phone (989) 799-6871  
Fax (989) 799-4524



# ENVIROLINE® SERIES SINGLE-DOOR ENCLOSURES

## TECHNICAL DATA

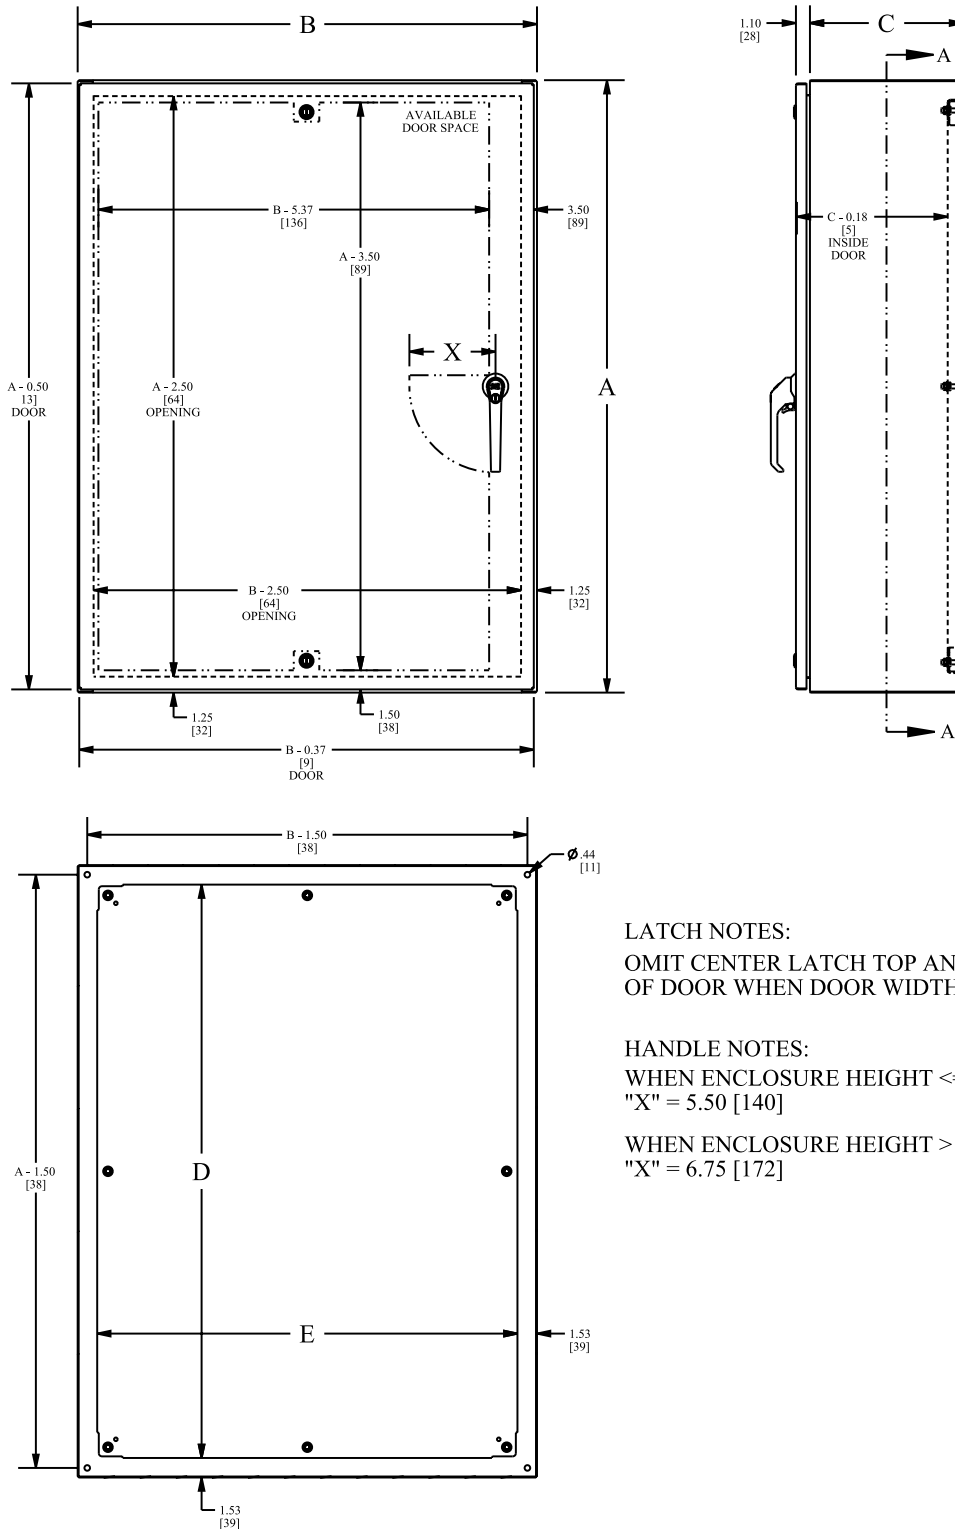

LATCH NOTES:  
 OMIT CENTER LATCH TOP AND BOTTOM  
 OF DOOR WHEN DOOR WIDTH IS < 30.00 [762]

HANDLE NOTES:  
 WHEN ENCLOSURE HEIGHT <= 42.00 [1067]  
 "X" = 5.50 [140]  
 WHEN ENCLOSURE HEIGHT > 42.00 [1067]  
 "X" = 6.75 [172]



Phone (989) 799-6871  
 Fax (989) 799-4524

## Enviroline® Series Two-Door Enclosures With 3-Point Hardware

### Application -

Designed to house electrical and electronic controls, instrumentation and components in indoor & outdoor locations. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at [www.saginawcontrol.com](http://www.saginawcontrol.com).

### Construction -

- 0.104" carbon steel.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Removable center post.
- Heavy duty lifting eyes anchored into reinforced top.
- Body stiffeners.
- Concealed hinges.
- Black keylocking/padlocking handles.
- 3-point latching mechanism.
- Removable print pocket.
- 12" removable floor stands.
- Panel supports.
- Black quarter turn latches as required.
- Provisions for mechanical interlock.
- Oil & water resistant gasket.
- Ground stud on door and body.
- Provisions for light kit.
- Hole plugs provided to seal holes in bottom of enclosure.

### Options -

Provisions for mechanical interlock. See Accessory section to order.

### Finish -

ANSI-61 gray powder coated inside and out. Optional sub-panels powder coated white.

### IS4 - Industry Standards -

NEMA Type 3R, 4, 12 & Type 13  
UL Listed Type 3R, 4, & 12  
CSA Type 3R, 4 & 12  
IEC 60529 IP66

\*\*\*Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

## ENVIROLINE® SERIES TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE


ENCLOSURE PRODUCT CODE E2						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (D)	Panel Width (E)	List Price
SCE-60EL4812LPPL	60.00	48.00	12.00	IS4	1,997.80	SCE-60P48	56.00	44.00	268.38
SCE-60EL4818LPPL	60.00	48.00	18.00	IS4	2,037.17	SCE-60P48	56.00	44.00	268.38
SCE-60EL6012LPPL	60.00	60.00	12.00	IS4	2,189.71	SCE-60P60	56.00	56.00	331.68
SCE-60EL6018LPPL	60.00	60.00	18.00	IS4	2,229.09	SCE-60P60	56.00	56.00	331.68
SCE-72EL6012LPPL	72.00	60.00	12.00	IS4	2,448.04	SCE-72P60	68.00	56.00	394.98
SCE-72EL6018LPPL	72.00	60.00	18.00	IS4	2,478.80	SCE-72P60	68.00	56.00	394.98
SCE-72EL7212LPPL	72.00	72.00	12.00	IS4	2,743.30	SCE-72P72	68.00	68.00	470.93
SCE-72EL7218LPPL	72.00	72.00	18.00	IS4	2,817.10	SCE-72P72	68.00	68.00	470.93
SCE-72EL7224LPPL	72.00	72.00	24.00	IS4	3,186.15	SCE-72P72	68.00	68.00	470.93



Phone (989) 799-6871  
Fax (989) 799-4524



# ENVIROLINE® SERIES TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE TECHNICAL DATA

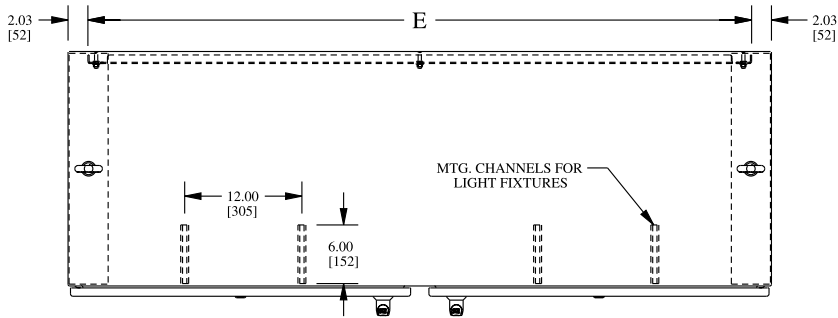

**LATCH NOTE:**  
Omit center latch top and bottom of door when door width is  $< 30.00$  [762]

