

Stainless Steel Enviroline® Series Wall-Mount Two-Door Enclosures With 3-Point Hardware

Application -

Designed to house electrical and electronic controls, instrumentation and components. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Removable center posts permit easy sub-panel installation.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black keylocking padlocking handles.
- 3-point latching mechanism.
- Removable print pocket.
- Oil & water resistant gasket.
- Ground stud on door and body.

Options -

Provisions for mechanical interlock.
See accessory section to order.

Finish -

#4 Brushed finish on all exterior surfaces.
Optional sub-panels powder coated white.

Notes -

Mechanical Interlock not for use in Enclosures 24" in height.

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 3R, 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

ENCLOSURE PRODUCT CODE S5						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (E)	Panel Width (F)	List Price
SCE-24EL4210SSWFLP	24.00	42.00	10.00	IS6	2,990.12	SCE-42P24	39.00	21.00	91.14
SCE-24EL4810SSWFLP	24.00	48.00	10.00	IS6	3,108.66	SCE-48P24	45.00	21.00	98.74
SCE-30EL4210SSWFLP	30.00	42.00	10.00	IS6	3,168.28	SCE-42P30	39.00	27.00	116.47
SCE-30EL4810SSWFLP	30.00	48.00	10.00	IS6	3,347.42	SCE-48P30	45.00	27.00	129.13
SCE-30EL6010SSWFLP	30.00	60.00	10.00	IS6	3,758.21	SCE-60P30	57.00	27.00	159.52
SCE-36EL4212SSWFLP	36.00	42.00	12.00	IS6	3,772.54	SCE-42P36	39.00	33.00	136.72
SCE-36EL4812SSWFLP	36.00	48.00	12.00	IS6	3,866.89	SCE-48P36	45.00	33.00	154.46
SCE-36EL6012SSWFLP	36.00	60.00	12.00	IS6	4,269.15	SCE-60P36	57.00	33.00	189.89
SCE-42EL4212SSWFLP	42.00	42.00	12.00	IS6	3,824.34	SCE-42P42	39.00	39.00	156.97
SCE-42EL4812SSWFLP	42.00	48.00	12.00	IS6	4,248.08	SCE-48P42	45.00	39.00	177.24
SCE-42EL6012SSWFALP	42.00	60.00	12.00	IS6	4,460.85	SCE-60BFP42	56.00	38.00	230.41
SCE-48EL4812SSWFLP	48.00	48.00	12.00	IS6	4,359.04	SCE-48P48	44.00	44.00	212.67





Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

TECHNICAL DATA

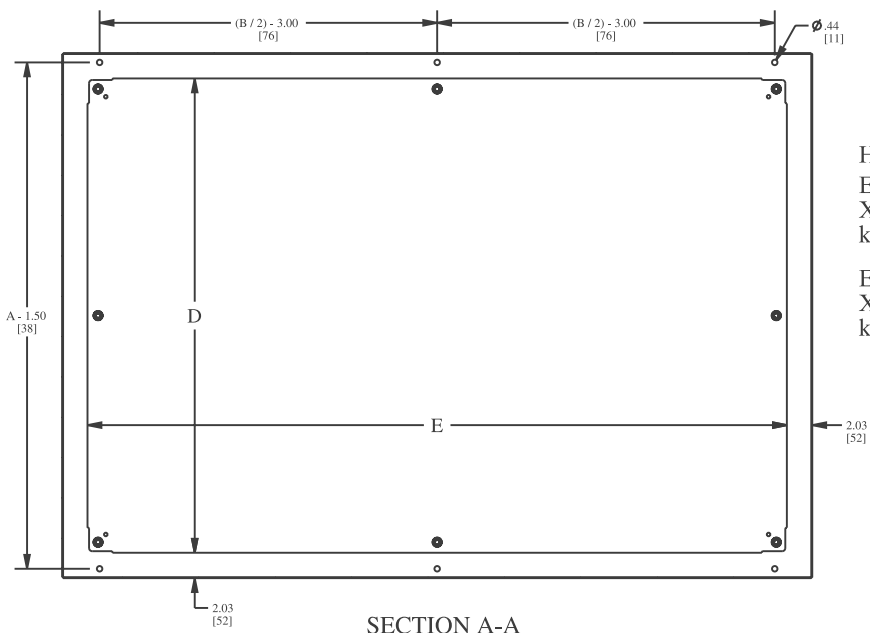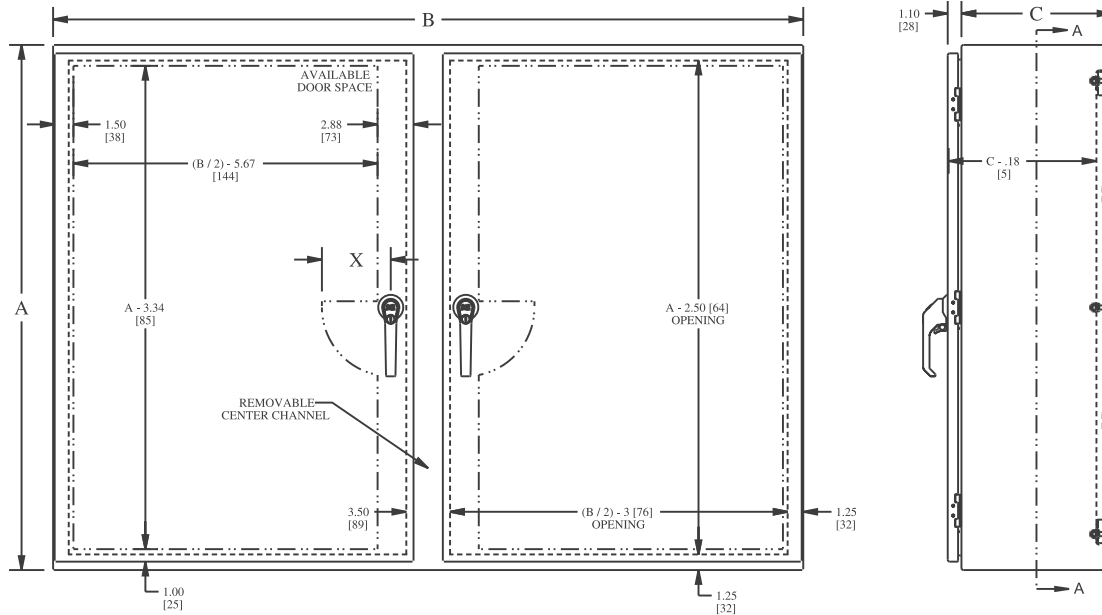

HANDLE NOTES:

Enclosures ≤ 42.00 [1067] in height
 $X = 5.50$ [140] and uses 5.00 [127]
 key-locking/padlocking handle.

Enclosures > 42.00 [1067] in height
 $X = 6.75$ [171] and uses 7.00 [178]
 key-locking/padlocking handle.



Phone (989) 799-6871
 Fax (989) 799-4524

- 1 Operator System Enclosures
- 2 Wall-Mount Enclosures
- 3 Free-Standing & Floor-Mounted Enclosures
- 4 Modular Enclosures
- 5 Operator System Enclosures (Stainless Steel)
- 6 Wall-Mount Enclosures (Stainless Steel)
- 7 Free-Standing & Floor-Mounted Enclosures (Stainless Steel)
- 8 Non-Metallic Enclosures
- 9 Accessories
- 10 Technical Information
- 11 Index