

SLIMLINE LIGHT

SL 025



- > Compact design
- > Electronic ballast
- > Optional integrated receptacle
- > Screw or magnet mount
- > Long-life energy saving lamp
- > On/off switch


The SL 025 light was designed to fit in tight spaces in enclosures. It features an optional integrated receptacle so that electrical devices (e.g. power tools) can be easily plugged in when needed. The standard light can be screw mounted in a variety of positions, or the light can be fitted with an available magnet mount.

Photo: Slimline light with on/off switch and integrated receptacle (Germany), Part No. 02520.0-00



TECHNICAL DATA

Power consumption	11 W (~ 75 W incandescent bulb)
Luminosity	900 Lm
Lamp type	compact fluorescent, 2G7 base, electronic ballast
Service life	10,000 hrs.
Switch (for light only)	on/off switch
Connection	3-pole terminal AWG 16 max. (2.5 mm ²) with strain relief only (cable not included), clamping torque 0.8 Nm max.
Housing	plastic, UL 94V-0, light grey
Mounting	M5 screws (not included), 11.8" (300 mm) hole distance or optional attached magnet (see part nos. below)
Operating / Storage temperature	-4 to +122 °F (-20 to +50 °C) / -49 to +158 °F (-45 to +70 °C)
Operating / Storage humidity	max. 90 %RH (non-condensing)
Dimensions	13.6 x 3.6 x 1.6" (345 x 91 x 40 mm)
Weight	approx. 0.9 lbs. (400 g), 1.3 lbs (600 g) with magnet
Protection type	IP20
Note	DC 24-48 V available upon request

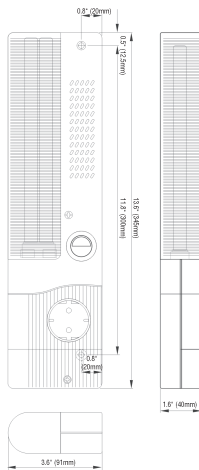

Part No. with On/Off Switch	Model	Operating Voltage	Receptacle	Rec. max. current	Protection class	Approvals		
02520.0-00	without magnet	AC 230 V, 50/60 Hz	Germany/Russia	16 A	I (grounded)	VDE	-	GOST-R
02520.1-00	with magnet	AC 230 V, 50/60 Hz	Germany/Russia	16 A	I (grounded)	VDE	-	GOST-R
02521.0-00	without magnet	AC 230 V, 50/60 Hz	France/Poland	16 A	I (grounded)	VDE	-	GOST-R
02521.1-00	with magnet	AC 230 V, 50/60 Hz	France/Poland	16 A	I (grounded)	VDE	-	GOST-R
02522.0-00	without magnet	AC 230 V, 50/60 Hz	Switzerland	10 A	I (grounded)	VDE	-	GOST-R
02522.1-00	with magnet	AC 230 V, 50/60 Hz	Switzerland	10 A	I (grounded)	VDE	-	GOST-R
02523.0-00	without magnet	AC 230 V, 50/60 Hz	UK/Ireland	13 A	I (grounded)	VDE	-	GOST-R
02523.1-00	with magnet	AC 230 V, 50/60 Hz	UK/Ireland	13 A	I (grounded)	VDE	-	GOST-R
02524.0-01	without magnet	AC 120 V, 50/60 Hz	USA/Canada	15 A	I (grounded)	-	UL File No. E234324	GOST-R
02524.1-01	with magnet	AC 120 V, 50/60 Hz	USA/Canada	15 A	I (grounded)	-	UL File No. E234324	GOST-R
02527.0-00	without magnet	AC 230 V, 50/60 Hz	none	-	II (double insulated)	VDE	UL File No. E234324	GOST-R
02527.1-00	with magnet	AC 230 V, 50/60 Hz	none	-	II (double insulated)	VDE	UL File No. E234324	GOST-R
02527.0-10	without magnet	AC 120 V, 50/60 Hz	none	-	II (double insulated)	-	UL File No. E234324	GOST-R
02527.1-10	with magnet	AC 120 V, 50/60 Hz	none	-	II (double insulated)	-	UL File No. E234324	GOST-R