

PKS 336X

AIR/AIR HEAT EXCHANGERS

180 W/°C

The PKS 336X Series Air/Air Heat Exchangers use **Pfannenberg's Kinetic System™** next generation cooling to exchange and move heat from an electrical enclosure to the outside environment. This is a perfect solution when concerned with the open loop designs that don't prevent corrosive gas, humidity and dust from entering the enclosure. Designed for indoor cooling, outdoor or remote applications that require a closed loop system to protect electronics. Available in 3 models; **PKS 3361**, **PKS 3363**, **PKS 3364**.

PFANNENBERG KINETIC SYSTEM™



Uses next generation cooling technology that out-performs conventional heat exchanger and/or heat pipe solutions.

Best CCPD™

Produces superior Cooling Capacity Per Density vs. conventional heat exchanger and/or heat pipe solutions.

Energy Efficient


Utilizes lower temperature ambient air to cool warmer internal air without an active component such as a compressor which consumes high amounts of energy.

Reduced Maintenance

With only two mechanical components (fans), potential failure point is reduced to ensure continuous uptime of your processes.

Flexible Mounting Options

Unit can be installed vertically or horizontally, allowing the cool air to be focused where it is needed most.

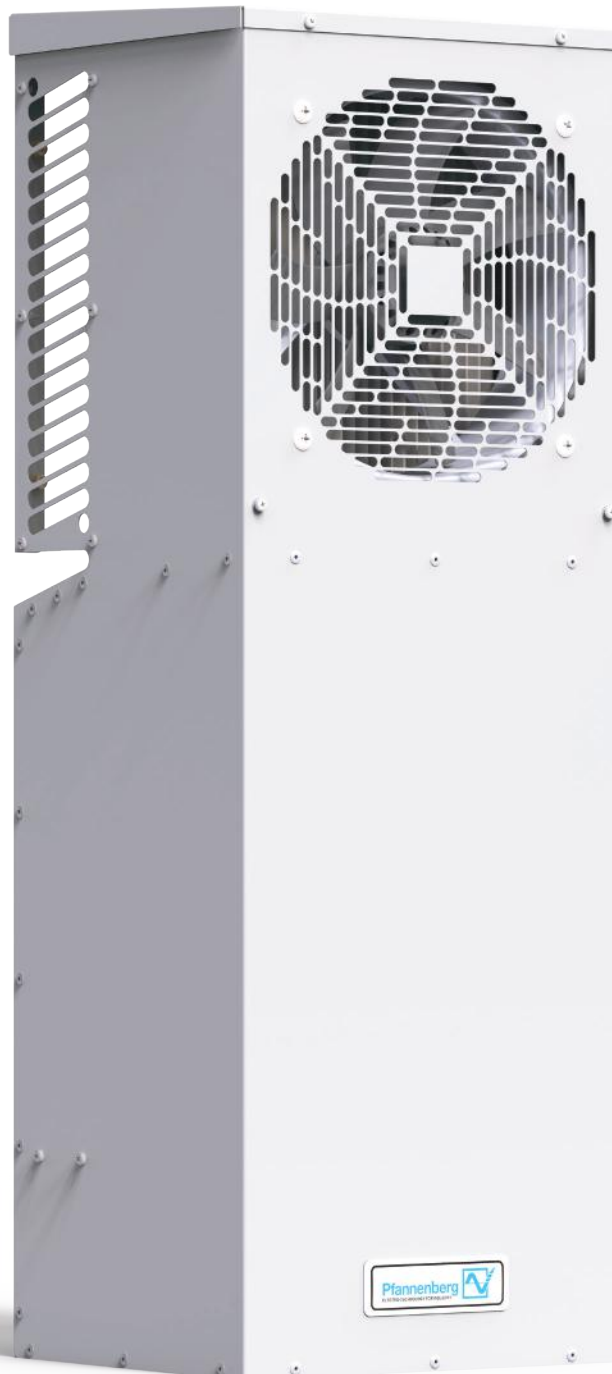

Closed Loop Design

Designed to isolate external ambient air from internal air eliminating the risk of contaminants entering the cabinet. Compared to Filterfans® with Rainhoods, the PKS seals against gaseous substances, humidity and airborne particulates such as dust, keeping it away from sensitive components within the electrical enclosure.

Easy Installation

Our compact lightweight design means that the unit can be installed by just one person.

Self Protected from Harsh Environments

Our unit is uniquely designed to protect itself in NEMA 3R, 4, and 4X environments. An example of this is the location of our control electronics within our dry, cool interior circuit.

Eliminates Hotspots

High CFM fan for good air flow within the enclosure, ideal for removing hot spots.



PKS 336X (180 Watts/°C) Kinetic System Air/Air Heat Exchangers

Model Number	Part Number	Voltage 50/60 Hz (VAC)	Specific Cooling Capacity		Cooling Capacity @ ΔT = 20°C (BTU/hr)	Power Consumption (Watts)	Nominal Run Current (Amps)	Mounting Dimensions* (Inches)			Weight (without packaging) (lbs)
			(W/°C)	(W/°F)				Width	Depth	Height	
PKS 3361 Indoor Rated (NEMA Type 12)	12480911005	115	180	100	12,200	353	<3	12	11	35	54
	12480921005	230	180	100	12,200	245	<2	12	11	35	54
	12480931005	400/460	180	100	12,200	245	<1	12	11	35	64
PKS 3363 Outdoor Rated (NEMA Type 3R/4)	12480913005	115	180	100	12,200	345	<3	12	11	35	60
	12480923005	230	180	100	12,200	245	<2	12	11	35	60
	12480933005	400/460	180	100	12,200	245	<1	12	11	35	70
PKS 3364 Washdown (NEMA Type 4/4x)	12480914008	115	180	100	12,200	345	<3	12	11	35	60
	12480924008	230	180	100	12,200	245	<2	12	11	35	60
	12480934008	400/460	180	100	12,200	245	<1	12	11	35	70

Additional Data	PKS 336X
Ambient Temp. Range (°F)	Min: -25°C / -13°F . . . +55°C / +131°F
Control Range (°F)	20°C to 60°C (68°F to 140°F); Factory Setting 35°C (95°F)
Design	Housing/Cover: Indoor/Outdoor - powder coated RAL 7035 (light gray); Washdown - 304 Stainless Steel

*Louver and rainhood dimensions not included on outdoor and washdown units.

For additional technical data, drawings and templates visit www.pfannenbergusa.com
Subject to technical amendments and misprints.

Available Models:



PKS 3361
Indoor Rated

PKS 3363
Outdoor Rated

PKS 3364
Washdown

Cooling Capacity Performance Curve

