

Free-Standing Two-Door Dual Access Enclosures

Application -

Designed to house a variety of electrical and electronic controls and instruments. Provisions for optional surface mounting or rack mounting of almost any type of equipment. Provides protection from dust, dirt, water and oil. For outdoor application a drip shield and drain holes are required. The enclosures are extra deep for applications requiring more interior space. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.104" carbon steel.
- Seams continuously welded and ground smooth, no holes or knockouts.
- Strong rigid construction.
- Lifting eyes for easy handling.
- Black zinc die cast keylocking/padlocking handle.
- 3-point latching mechanism.
- Latch rods have ramp shoes for easier door closing.
- Concealed hinges.
- Flange trough collar around all sides of door opening.
- Removable print pocket on door with 3-point latch..
- Mounting channels welded horizontally on sides of interior body at top, bottom and middle for mounting optional panels or rack mounting angles.
- Hole plugs provided to seal holes in bottom of enclosure.
- Oil resistant gasket.
- Ground stud on door and body.
- Removable and interchangeable doors.
- Provisions for light kit.

Finish -

ANSI-61 gray powder coated inside and out. Optional sub-panels powder coated white.

Accessories - See page 135

IS3 - Industry Standards -

NEMA Type 3R, 12 & Type 13
UL Listed Type 3R & 12
CSA Type 3R & 12
IEC 60529 IP55

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

FREE-STANDING TWO-DOOR DUAL ACCESS ENCLOSURES


ENCLOSURE PRODUCT CODE A2					
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price
SCE-724824FSDAD	72.00	48.00	24.00	IS3	2,551.13
SCE-726024FSDAD	72.00	60.00	24.00	IS3	2,866.42
SCE-726036FSDAD	72.00	60.00	36.00	IS3	3,298.78
SCE-727224FSDAD	72.00	72.00	24.00	IS3	3,181.73
SCE-907224FSDAD	90.00	72.00	24.00	IS3	3,653.50



Phone (989) 799-6871
Fax (989) 799-4524



FREE-STANDING TWO-DOOR DUAL ACCESS ENCLOSURES TECHNICAL DATA

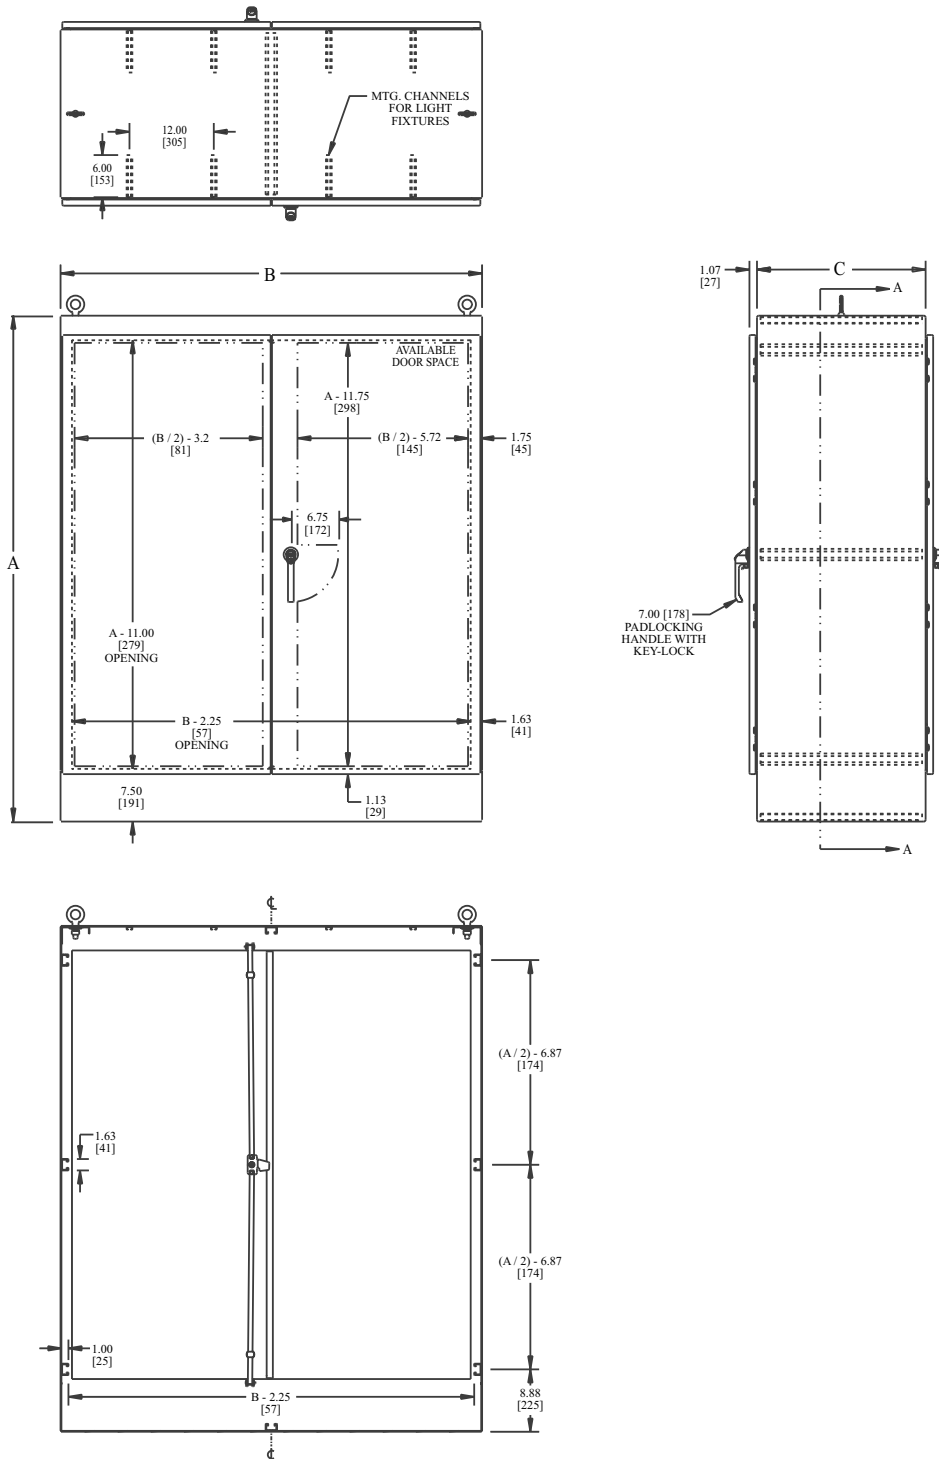

SECTION A-A



Phone (989) 799-6871
Fax (989) 799-4524

- 1 Operator System Enclosures
- 2 Wall-Mount Enclosures
- 3 Free-Standing & Floor-Mount Enclosures
- 4 Modular Enclosures
- 5 Operator System Enclosures (Stainless Steel)
- 6 Wall-Mount Enclosures (Stainless Steel)
- 7 Free-Standing & Floor-Mount Enclosures (Stainless Steel)
- 8 Non-Metallic Enclosures
- 9 Accessories
- 10 Technical Information
- 11 Index